


1 A very low dropout fast transient ultra-low noise linear regulator

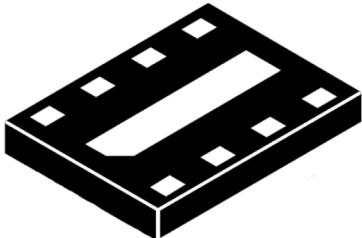

DFN8 1.2 x 1.6 mm

Features

- Input voltage from 1.8 to 5.5 V
- Ultra-low dropout voltage (120 mV typ. at 1 A load and $V_{OUT} = 3.3$ V)
- Very low quiescent current (100 μ A typ. at no-load, 0.03 μ A typ. in off mode)
- Output voltage tolerance: $\pm 1\%$ from -40 °C to +85 °C
- Ultra-low Noise: 13 μ V RMS Noise from 10 Hz to 100 kHz at $V_{OUT} = 3.0$ V
- High PSRR (70 dB@1 kHz)
- Wide range of output voltages available on request: from 1.0 V up to 5.0 V in 50 mV step
- Logic-controlled electronic shutdown
- Internal soft-start
- Optional output voltage discharge feature
- Compatible with ceramic capacitor $C_{OUT} = 1 \mu$ F
- Internal current limit foldback and thermal protections
- Available in DFN8 (1.2x1.6 mm)
- Operating temperature range: -40 °C to 125 °C

Applications

- Mobile phones
- Tablets
- Battery-powered systems
- Camera supply

Maturity status link

[LD56100](#)

Description

The LD56100 high accuracy voltage regulator provides 1 A of current from an input voltage ranging from 1.8 V to 5.5 V, with a typical dropout voltage of 120 mV.


It is available in DFN8 (1.2 x 1.6 mm) package, allowing the maximum space saving.

The device is stabilized with a ceramic capacitor on the output. The ultra-low drop voltage, low quiescent current and fast transient response, together with the internal soft-start circuit, make the LD56100 suitable for low power battery-operated applications.

An enable logic control function puts the LD56100 in shutdown mode allowing a total current consumption lower than 0.1 μ A. Short-circuit protection with current limit foldback and thermal protection are also included.

1 Diagram

Figure 1. Block diagram

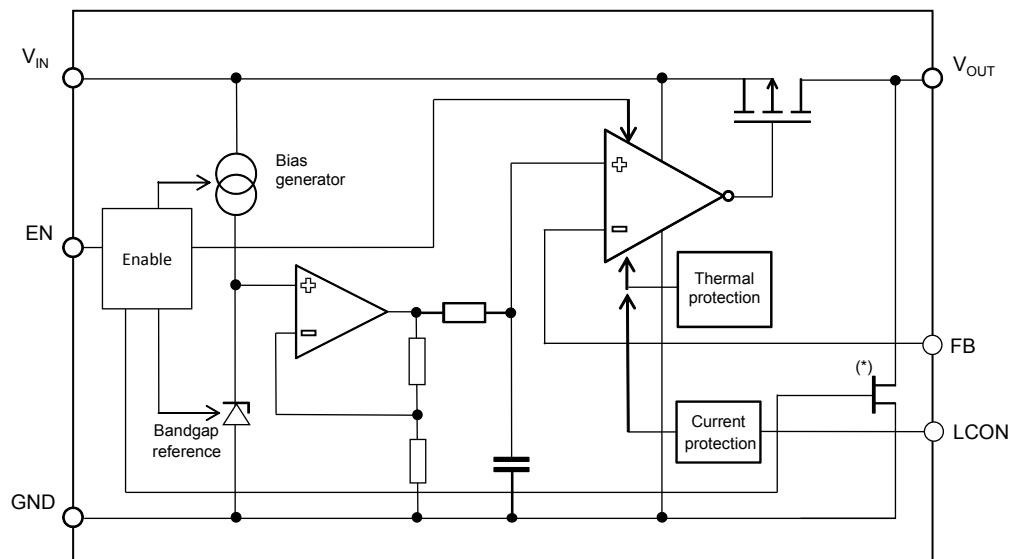

Note: (*) The output discharge MOSFET is optional.

2 Pin configuration

Figure 2. Pin connection (top view)





Table 1. Pin description

| Pin # DFN8 | Symbol | Function |
|-------------|-----------|--|
| 1 | V_{OUT} | Output voltage |
| 2 | V_{OUT} | |
| 3 | LCON | Current limit selection. High 1 A, low 0.5 A |
| 4 | FB | Feedback pin, to be connected as close as possible to the load positive terminal |
| 5 | GND | Common ground |
| 6 | EN | Enable pin logic input: low = shutdown, high = active |
| 7 | V_{IN} | Input voltage |
| 8 | V_{IN} | |
| Thermal pad | GND | Connect to GND on the PCB |

3 Typical application

Figure 3. Typical application circuit

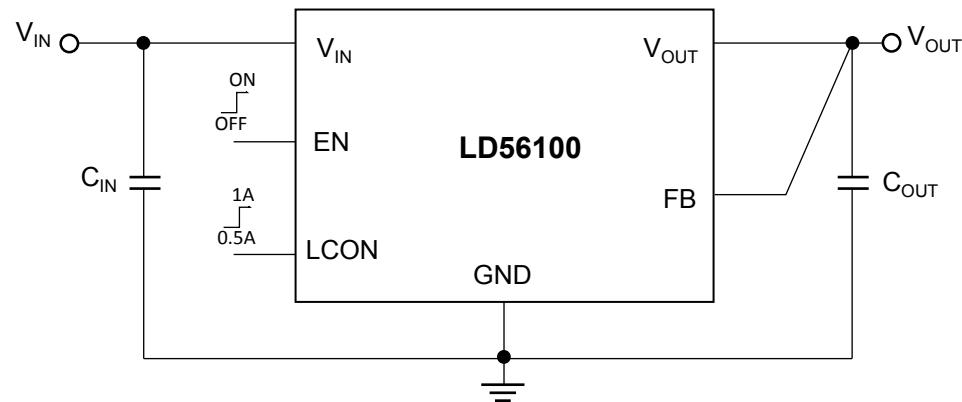

4

Maximum ratings

Table 2. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|--------------------|--------------------------------------|-------------------------|------|
| V_{IN} | Input voltage | - 0.3 to 7 | V |
| V_{OUT} | Output voltage | - 0.3 to $V_{IN} + 0.3$ | V |
| $V_{EN}, FB, LCON$ | Enable and feedback input voltage | - 0.3 to 7 | V |
| I_{OUT} | Output current | Internally limited | mA |
| P_D | Power dissipation | Internally limited | mW |
| T_{STG} | Storage temperature range | - 40 to 150 | °C |
| T_{OP} | Operating junction temperature range | - 40 to 125 | °C |

Note:

Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. All values are referred to GND.

Table 3. Thermal data

| Symbol | Parameter | Value | Unit |
|------------|-------------------------------------|-------|------|
| R_{thJA} | Thermal resistance junction-ambient | 80 | °C/W |

Table 4. ESD performance

| Symbol | Parameter | Test conditions | Value | Unit |
|--------|------------------------|-----------------|-------|------|
| ESD | ESD Protection voltage | HBM | 2 | kV |
| | | CDM | 500 | V |

5 Electrical characteristics

$V_{IN} = V_{OUT(NOM)} + 0.5 \text{ V}$ or $V_{IN} = 1.8 \text{ V}$ if greater; $C_{IN} = C_{OUT} = 1 \mu\text{F}$, $I_{OUT} = 1 \text{ mA}$, $V_{EN} = 1.2 \text{ V}$, typical values are at $T_J = 25^\circ\text{C}$; min./max. values are at $-40^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$, unless otherwise specified.

Table 5. Electrical characteristics

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|------------------|---------------------------------------|--|---|-------|------|------------------|
| V_{IN} | Operating input voltage | | 1.8 | | 5.5 | V |
| V_{OUT} | V_{OUT} accuracy | $V_{OUT(NOM)} + 0.5 \text{ V} \leq V_{IN} \leq 5.5 \text{ V}$; $I_{OUT} = 0 \text{ to } 1 \text{ A}$; $-40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$ | -1.0 | | 1.0 | % |
| | | $V_{OUT(NOM)} + 0.5 \text{ V} \leq V_{IN} \leq 5.5 \text{ V}$; $I_{OUT} = 0 \text{ to } 1 \text{ A}$; $-40^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$ | -2.0 | | 1.0 | % |
| ΔV_{OUT} | Static line regulation ⁽¹⁾ | $V_{OUT(NOM)} + 0.5 \text{ V} \leq V_{IN} \leq 5.0 \text{ V}$, $I_{OUT} = 10 \text{ mA}$ | | 0.002 | 0.06 | %/V |
| ΔV_{OUT} | Static load regulation | $I_{OUT} = 10 \text{ mA}$ to 1000 mA | | 2 | 6 | mV |
| V_{DROP} | Dropout voltage | $I_{OUT} = 1 \text{ A}$; $V_{OUT} = V_{OUT(NOM)} - 0.1 \text{ V}$ | $V_{OUT(NOM)} = 1.2 \text{ V}$ ⁽²⁾ | 370 | 585 | mV |
| | | | $V_{OUT(NOM)} = 1.75 \text{ V}$ | 220 | 295 | |
| | | | $V_{OUT(NOM)} = 1.8 \text{ V}$ | 200 | 285 | |
| | | | $V_{OUT(NOM)} = 1.85 \text{ V}$ | 195 | 280 | |
| | | | $V_{OUT(NOM)} = 2.5 \text{ V}$ ⁽²⁾ | 140 | 190 | |
| | | | $V_{OUT(NOM)} = 2.8 \text{ V}$ ⁽²⁾ | 130 | 175 | |
| | | | $V_{OUT(NOM)} = 3.0 \text{ V}$ | 125 | 165 | |
| | | | $V_{OUT(NOM)} = 3.3 \text{ V}$ | 120 | 155 | |
| | | | $V_{OUT(NOM)} = 3.5 \text{ V}$ ⁽²⁾ | 100 | 145 | |
| | | | $V_{OUT(NOM)} = 3.9 \text{ V}$ ⁽²⁾ | 90 | 135 | |
| e_N | Output noise voltage | 10 Hz to 100 kHz, $I_{OUT} = 10 \text{ mA}$, $V_{OUT} = 3.0 \text{ V}$ | | 13 | | μVRMS |
| SVR | Supply voltage rejection | $V_{IN} = V_{OUT(NOM)} + 1 \text{ V} +/- V_{RIPPLE}$ $V_{RIPPLE} = 0.2 \text{ V}$ Freq = 1 kHz, $I_{OUT} = 30 \text{ mA}$ | | 70 | | dB |
| | | $V_{IN} = V_{OUT(NOM)} + 1 \text{ V} +/- V_{RIPPLE}$ $V_{RIPPLE} = 0.2 \text{ V}$ freq. = 100 kHz $I_{OUT} = 30 \text{ mA}$ | | 55 | | |
| I_Q | Quiescent current | $I_{OUT} = 0 \text{ mA}$ | | 100 | 155 | μA |
| $I_{Standby}$ | Standby current | V_{IN} input current in OFF MODE: $V_{EN} = \text{GND}$ | | 0.03 | 2.0 | μA |
| I_{LIM} | Output current limit | $V_{OUT} = 0.9 \times V_{OUT(NOM)}$; LCON= V_{IN} or floating | 1100 | 1600 | | mA |
| | | $V_{OUT} = 0.9 \times V_{OUT(NOM)}$; LCON=GND | 600 | 800 | | |
| I_{sc} | Short-circuit current | $V_{OUT} = 0$ (foldback protection); LCON= V_{IN} or floating $V_{IN} < 5.0 \text{ V}$ | | 400 | | mA |
| | | $V_{OUT} = 0$ (foldback protection); LCON=GND, $V_{IN} < 5.0 \text{ V}$ | | 180 | | |
| R_{ON} | Output voltage discharge MOSFET | (LD56100DT version) | | 40 | | Ω |

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|----------------|--------------------------|--|------|------|------|--------------------|
| V_{EN} | Enable input logic low | $V_{IN} = 1.8 \text{ V to } 5.5 \text{ V}$ | | | 0.4 | V |
| | Enable input logic high | $V_{IN} = 1.8 \text{ V to } 5.5 \text{ V}$ | 1 | | | |
| I_{EN} | Enable pin input current | | | 100 | 400 | nA |
| V_{LCON} | LCON input logic low | $V_{IN} = 1.8 \text{ V to } 5.5 \text{ V}$ | | | 0.4 | V |
| | LCON input logic high | $V_{IN} = 1.8 \text{ V to } 5.5 \text{ V}$ | 1 | | | |
| I_{LCON} | LCON pin current | LCON=GND | | 550 | 700 | nA |
| | | LCON = V_{IN} | | 0.1 | 1 | |
| $T_{ON}^{(3)}$ | Turn-on time | $V_{OUT} = 1.8 \text{ V}$ | 60 | | | μs |
| T_{SHDN} | Thermal shutdown | | 170 | | | $^{\circ}\text{C}$ |
| | Hysteresis | | 20 | | | |
| C_{OUT} | Output capacitor | | 1.0 | | 22 | μF |

1. Not applicable for $V_{OUT(NOM)} \geq 5.0 \text{ V}$.
2. Simulation data.
3. Turn-on time is time measured between the enable input just exceeding V_{EN} high value and the output voltage just reaching 95 % of its nominal value.

6 Application information

6.1 Soft-start function

The LD56100 has an internal soft-start circuit. By increasing the start-up time up to 100 μ s, without the need of any external soft-start capacitor, this feature is able to keep the regulator inrush current at start-up under control.

6.2 Output discharge function

The LD56100 integrates a MOSFET connected between V_{out} and GND. This transistor is activated when the EN pin goes to low logic level and has the function to quickly discharge the output capacitor when the device is disabled by the user.

The device is available with or without the auto-discharge feature.

See Ordering information for more details.

6.3 Short-circuit and current limitation

The LD56100 is protected against short-circuit on the output. When the load current increases above 1.6 A typical the device starts limiting it to the I_{LIM} value. If the load resistance decreases even more then the foldback, circuit starts limiting the current to 0.4 A when $V_{OUT} = 0$.

When pulling LCON pin to ground, the I_{LIM} and I_{SC} values are reduced to 0.8 A and 0.18 A respectively.

6.4 Input and output capacitors

The LD56100 requires external capacitors to assure the regulator control loop stability.

Any good quality ceramic capacitor can be used but, the X5R and the X7R are suggested since they guarantee a very stable combination of capacitance and ESR overtemperature.

Locating the input/output capacitors as closer as possible to the relative pins is recommended.

The LD56100 requires an input capacitor with a minimum value of 1 μ F. This capacitor must be located as close as possible to the input pin of the device and returned to a clean analog ground.

The control loop is designed to be stable with any good quality output ceramic capacitor (such as X5R/X7R types) with a minimum value of 1 μ F and equivalent series resistance in the [3 – 300 m Ω] range. It is important to highlight that the output capacitor must maintain its capacitance and ESR in the stable region over the full operating temperature, load and input voltage ranges, to assure stability. Therefore, capacitance and ESR variations must be taken into account in the design phase to ensure the device works in the expected stability region.

The suggested combination of 1 μ F input and output capacitors offers a good compromise among the stability of the regulator, optimum transient response and total PCB area occupation.

7

Typical characteristics

($C_{IN} = C_{OUT} = 1 \mu F$, $V_{OUT} = 3.0 V$, V_{EN} to V_{IN} , $T_J = 25^\circ C$ unless otherwise specified)

Figure 4. Output voltage vs. temperature ($V_{IN} = 3.0 V$, $I_{OUT} = 1 mA$, normal mode)

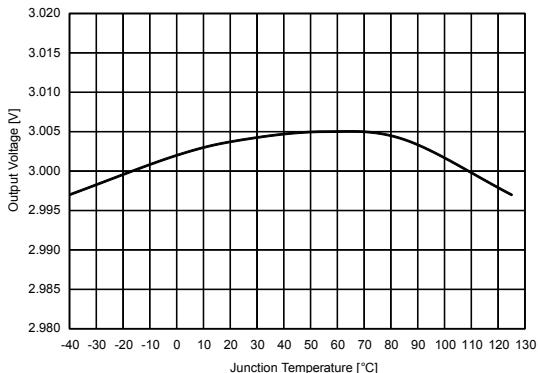


Figure 5. Output voltage vs. temperature ($V_{IN} = 3.0 V$, $I_{OUT} = 1 A$, normal mode)

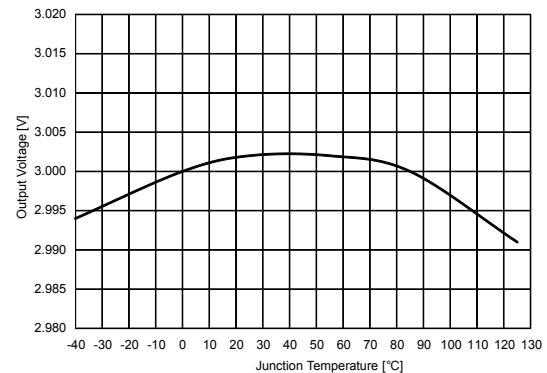


Figure 6. Line regulation vs. temperature ($V_{OUT} = 3.0 V$, $I_{OUT} = 1 mA$)

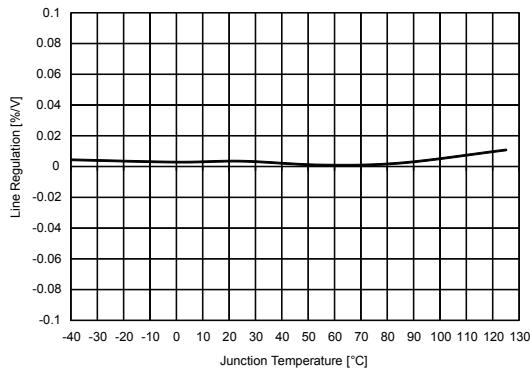


Figure 7. Load regulation vs. temperature ($V_{OUT} = 3.0 V$, I_{OUT} = 1 A to 10 mA)

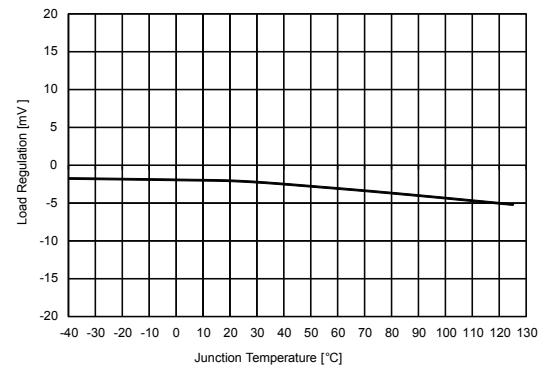


Figure 8. Quiescent current vs. temperature ($V_{OUT} = 3.0 \text{ V}$, $I_{OUT} = 0 \text{ mA}$)

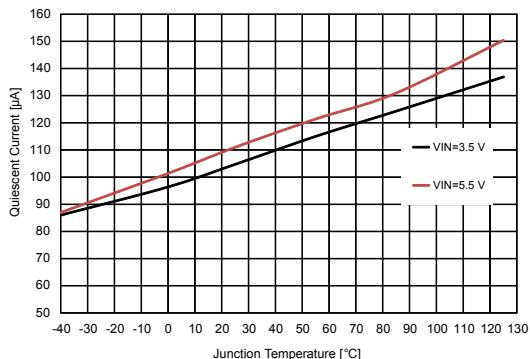


Figure 9. Quiescent current vs. temperature ($V_{OUT} = 3.0 \text{ V}$)

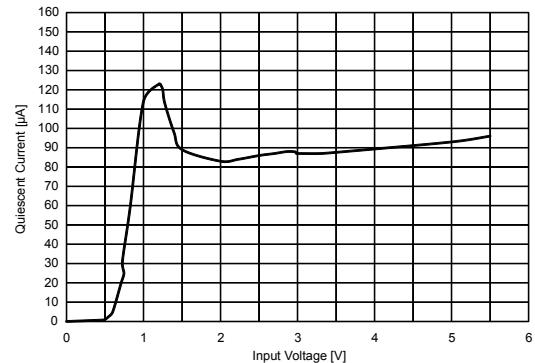


Figure 10. Quiescent current vs. temperature ($V_{IN} = 3.5 \text{ V}$, $I_{OUT} = 3.0 \text{ mA}$)

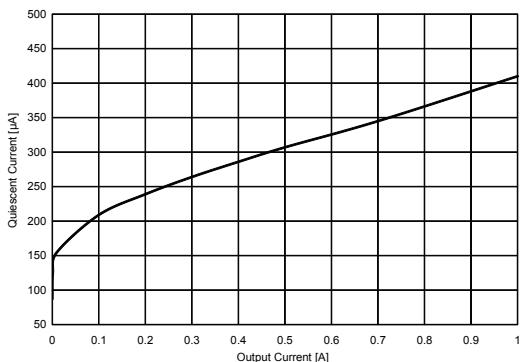


Figure 11. Output voltage vs. input voltage ($I_{OUT} = 1 \text{ mA}$)

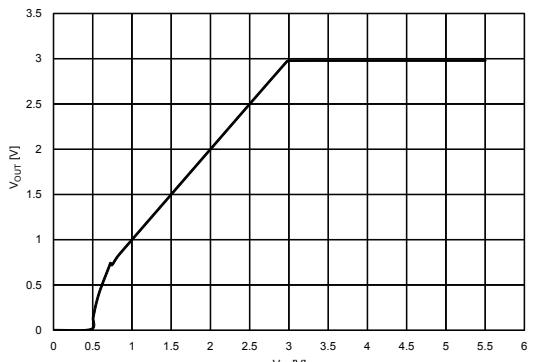


Figure 12. Dropout voltage vs. load current

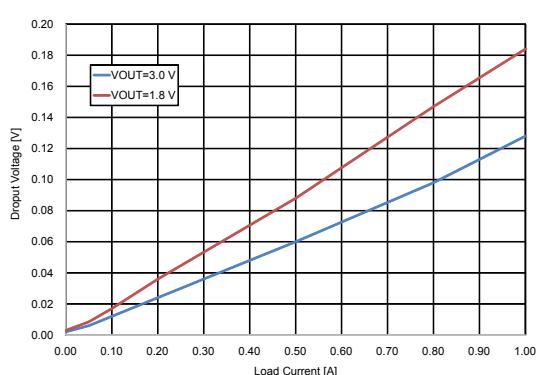


Figure 13. Dropout voltage vs. temperature ($V_{OUT} = 3.0 \text{ V}$; $I_{OUT} = 1 \text{ A}$)

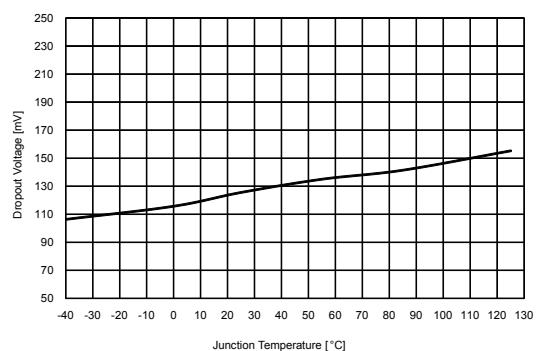


Figure 14. Foldback characteristic ($LCON = V_{IN}$)

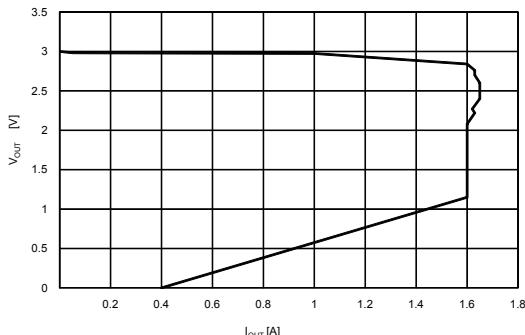


Figure 15. Foldback characteristic ($LCON = GND$)

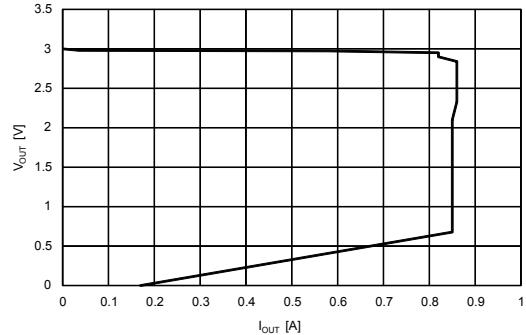


Figure 16. Supply voltage rejection vs. frequency ($V_{OUT} = 3.0 \text{ V}$; $I_{OUT} = 1 \text{ mA}$)

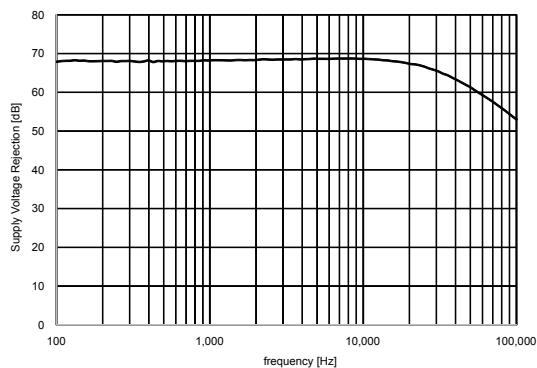


Figure 17. Noise spectral density ($V_{OUT} = 3.0 \text{ V}$; $I_{OUT} = 10 \text{ mA}$)

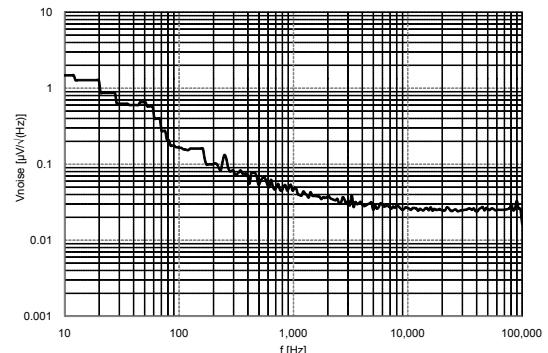


Figure 18. EN current vs. temperature

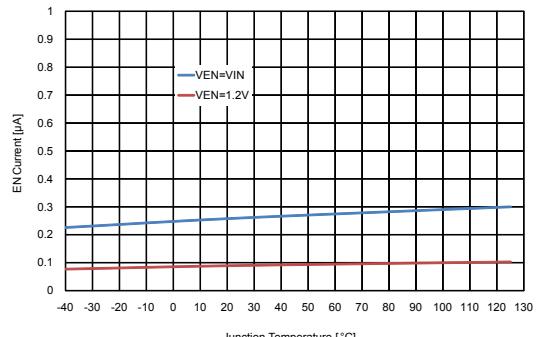


Figure 19. LCON current vs. temperature

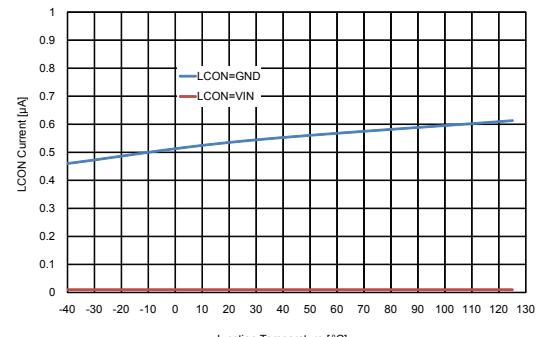


Figure 20. Line transient ($V_{IN} = 3.5$ V to 4.5 V; $I_{OUT} = 1$ mA)

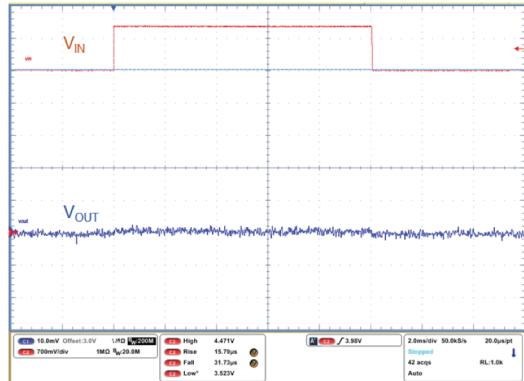


Figure 21. Turn-on V_{IN} driven ($V_{IN} = V_{EN} = 0$ V to 3.5 V; $I_{OUT} = 1$ mA)

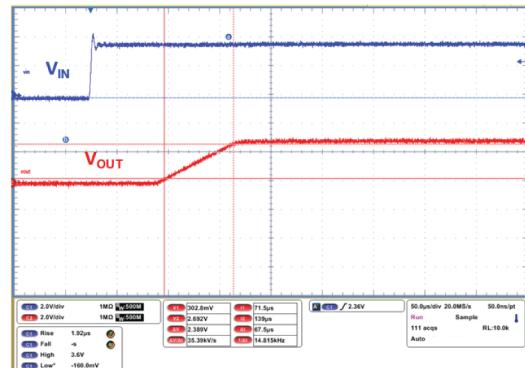


Figure 22. Turn-on driven light load ($V_{IN} = 3.5$ V; $V_{EN} = 0$ V to V_{IN} ; $t_{RISE} = 1$ μs; $I_{OUT} = 1$ mA)

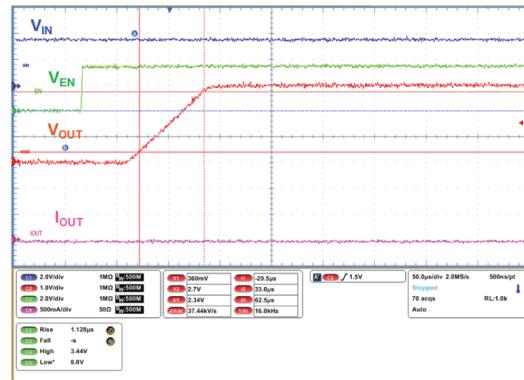


Figure 23. Turn-on driven full load ($V_{IN} = 3.5$ V; $V_{EN} = 0$ V; $t_{RISE} = 1$ μs; $I_{OUT} = 1$ A)


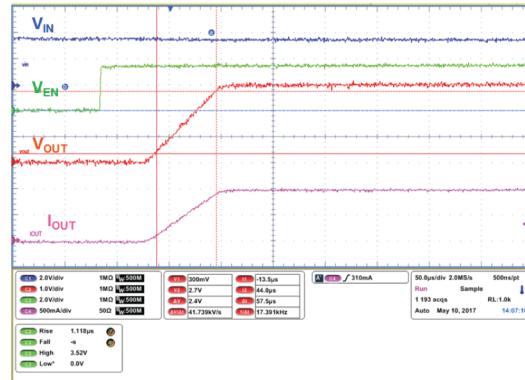


Figure 24. Load transient ($V_{IN} = V_{EN} = 3.5$ V; $t_{RISE} = 1$ μs; $I_{OUT} = 1$ mA to 1 A)

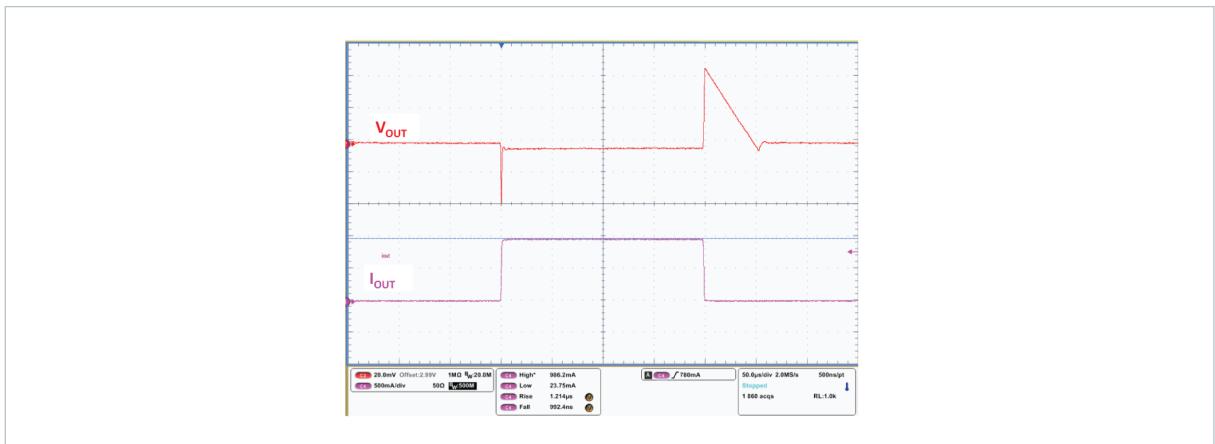


8**Package information**

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.


8.1 DFN8 (1.6x1.2 mm) package information

Figure 25. DFN8 (1.6x1.2 mm) package outline

BOTTOM VIEW

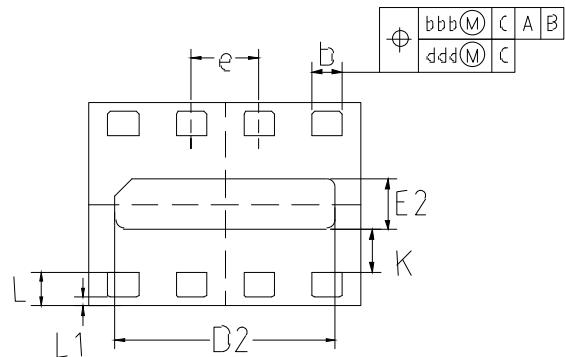

SIDE VIEW

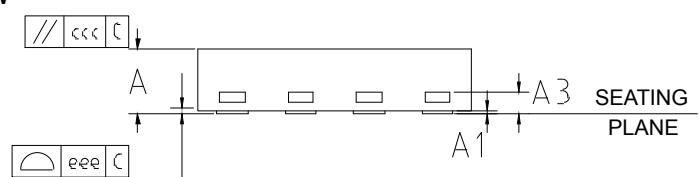

TOP VIEW

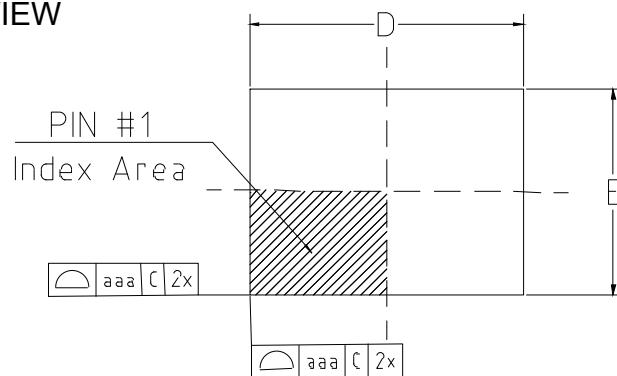


Table 6. DFN8 (1.6x1.2 mm) package mechanical data

| Dim. | mm | | |
|------|------|------------|------|
| | Min. | Typ. | Max. |
| A | 0.40 | 0.45 | 0.50 |
| A1 | 0.00 | 0.02 | 0.05 |
| A3 | | 0.127 Ref. | |
| b | 0.13 | 0.18 | 0.23 |
| D | | 1.60 BSC | |
| E | | 1.20 BSC | |
| e | | 0.40 BSC | |
| D2 | 1.20 | 1.30 | 1.40 |
| E2 | 0.20 | 0.30 | 0.40 |
| K | 0.20 | | |
| L | 0.15 | 0.20 | 0.25 |
| L1 | | 0.05 Ref. | |


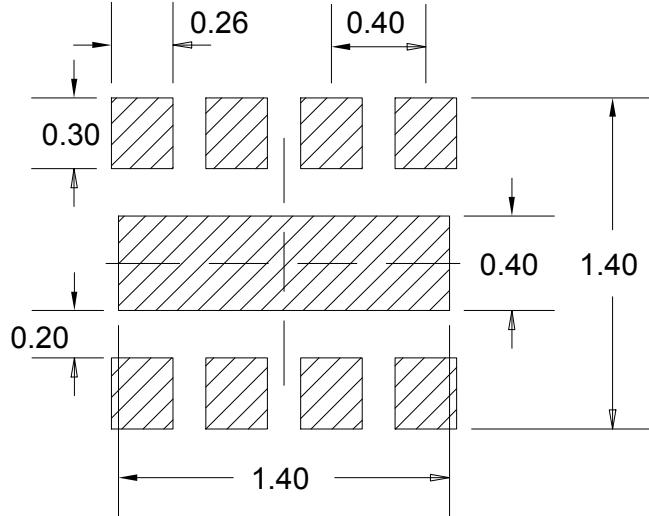
Figure 26. DFN8 (1.6x1.2 mm) recommended footprint

Figure 27. Carrier tape information

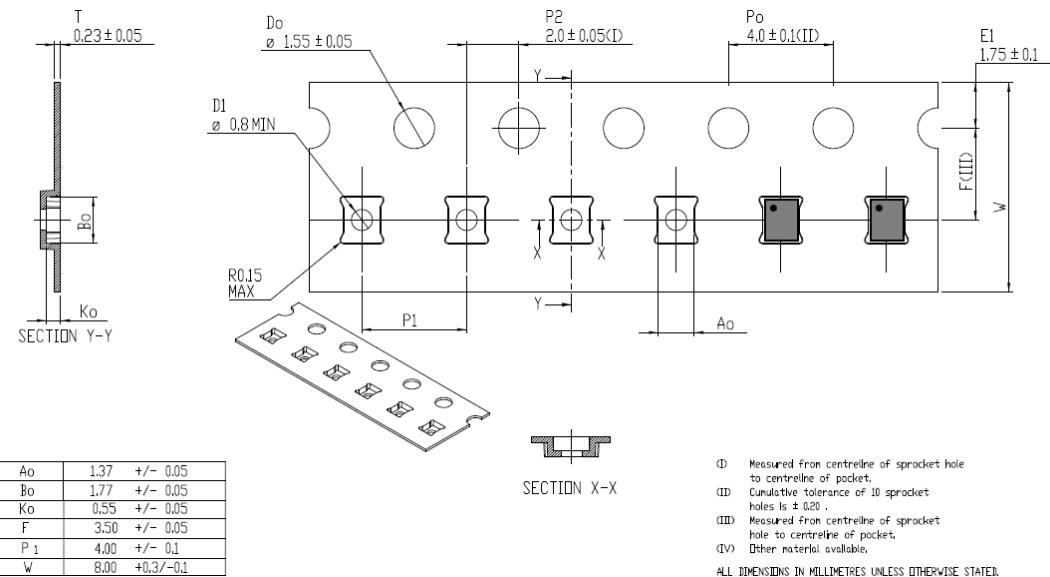

9 Ordering information

Table 7. Order code

| Order code | Output voltage (V) | Auto-discharge | Marking |
|----------------|--------------------|----------------|---------|
| LD56100DPU115R | 1.15 | Yes | S1E |
| LD56100DPU125R | 1.25 | Yes | S1F |
| LD56100DPU15R | 1.5 | Yes | S15 |
| LD56100DPU175R | 1.75 | Yes | S1A |
| LD56100DPU18R | 1.8 | Yes | S18 |
| LD56100DPU185R | 1.85 | Yes | S1B |
| LD56100DPU28R | 2.8 | Yes | S28 |
| LD56100DPU30R | 3.0 | Yes | S30 |
| LD56100DPU31R | 3.1 | Yes | S31 |
| LD56100DPU33R | 3.3 | Yes | S33 |

Revision history

Table 8. Document revision history

| Date | Revision | Changes |
|-------------|----------|------------------|
| 09-Jan-2018 | 1 | Initial release. |

Contents

| | | |
|-------------------------|---------------------------------------|-----------|
| 1 | Diagram | 2 |
| 2 | Pin configuration | 3 |
| 3 | Typical application | 4 |
| 4 | Maximum ratings | 5 |
| 5 | Electrical characteristics | 6 |
| 6 | Application information | 8 |
| 6.1 | Soft-start function | 8 |
| 6.2 | Output discharge function | 8 |
| 6.3 | Short-circuit and current limitation | 8 |
| 6.4 | Input and output capacitors | 8 |
| 7 | Typical characteristics | 9 |
| 8 | Package information | 13 |
| 8.1 | DFN8 (1.6x1.2 mm) package information | 14 |
| 9 | Ordering information | 17 |
| Revision history | | 18 |

List of tables

| | | |
|-----------------|---|----|
| Table 1. | Pin description | 3 |
| Table 2. | Absolute maximum ratings | 5 |
| Table 3. | Thermal data | 5 |
| Table 4. | ESD performance | 5 |
| Table 5. | Electrical characteristics | 6 |
| Table 6. | DFN8 (1.6x1.2 mm) package mechanical data | 15 |
| Table 7. | Order code | 17 |
| Table 8. | Document revision history | 18 |

List of figures

| | | |
|-------------------|---|----|
| Figure 1. | Block diagram | 2 |
| Figure 2. | Pin connection (top view) | 3 |
| Figure 3. | Typical application circuit | 4 |
| Figure 4. | Output voltage vs. temperature ($V_{IN} = 3.0\text{ V}$, $I_{OUT} = 1\text{ mA}$, normal mode) | 9 |
| Figure 5. | Output voltage vs. temperature ($V_{IN} = 3.0\text{ V}$, $I_{OUT} = 1\text{ A}$, normal mode) | 9 |
| Figure 6. | Line regulation vs. temperature ($V_{OUT} = 3.0\text{ V}$, $I_{OUT} = 1\text{ mA}$) | 9 |
| Figure 7. | Load regulation vs. temperature ($V_{OUT} = 3.0\text{ V}$, $I_{OUT} = 1\text{ A}$ to 10 mA) | 9 |
| Figure 8. | Quiescent current vs. temperature ($V_{OUT} = 3.0\text{ V}$, $I_{OUT} = 0\text{ mA}$) | 10 |
| Figure 9. | Quiescent current vs. temperature ($V_{OUT} = 3.0\text{ V}$) | 10 |
| Figure 10. | Quiescent current vs. temperature ($V_{IN} = 3.5\text{ V}$, $I_{OUT} = 3.0\text{ mA}$) | 10 |
| Figure 11. | Output voltage vs. input voltage ($I_{OUT} = 1\text{ mA}$) | 10 |
| Figure 12. | Dropout voltage vs. load current | 10 |
| Figure 13. | Dropout voltage vs. temperature ($V_{OUT} = 3.0\text{ V}$; $I_{OUT} = 1\text{ A}$) | 10 |
| Figure 14. | Foldback characteristic ($LCON = V_{IN}$) | 11 |
| Figure 15. | Foldback characteristic ($LCON = GND$) | 11 |
| Figure 16. | Supply voltage rejection vs. frequency ($V_{OUT} = 3.0\text{ V}$; $I_{OUT} = 1\text{ mA}$) | 11 |
| Figure 17. | Noise spectral density ($V_{OUT} = 3.0\text{ V}$; $I_{OUT} = 10\text{ mA}$) | 11 |
| Figure 18. | EN current vs. temperature | 11 |
| Figure 19. | $LCON$ current vs. temperature | 11 |
| Figure 20. | Line transient ($V_{IN} = 3.5\text{ V}$ to 4.5 V ; $I_{OUT} = 1\text{ mA}$) | 12 |
| Figure 21. | Turn-on V_{IN} driven ($V_{IN} = V_{EN} = 0\text{ V}$ to 3.5 V ; $I_{OUT} = 1\text{ mA}$) | 12 |
| Figure 22. | Turn-on driven light load ($V_{IN} = 3.5\text{ V}$; $V_{EN} = 0\text{ V}$ to V_{IN} ; $t_{RISE} = 1\text{ }\mu\text{s}$; $I_{OUT} = 1\text{ mA}$) | 12 |
| Figure 23. | Turn-on driven full load ($V_{IN} = 3.5\text{ V}$; $V_{EN} = 0\text{ V}$; $t_{RISE} = 1\text{ }\mu\text{s}$; $I_{OUT} = 1\text{ A}$) | 12 |
| Figure 24. | Load transient ($V_{IN} = V_{EN} = 3.5\text{ V}$; $t_{RISE} = 1\text{ }\mu\text{s}$; $I_{OUT} = 1\text{ mA}$ to 1 A) | 12 |
| Figure 25. | DFN8 (1.6x1.2 mm) package outline | 14 |
| Figure 26. | DFN8 (1.6x1.2 mm) recommended footprint | 15 |
| Figure 27. | Carrier tape information | 16 |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved