
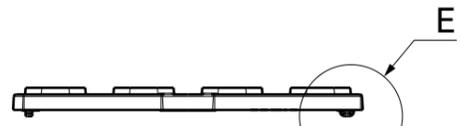
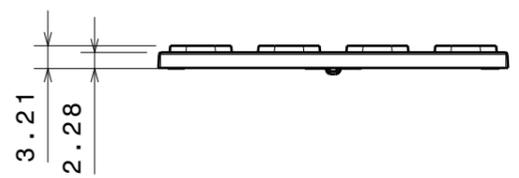


Light Pattern Direction




LENS: Recommended screw M3 for fixing
Use washer with screw if possible

STRADELLA-16 lens

PCB fixing: space for screw head

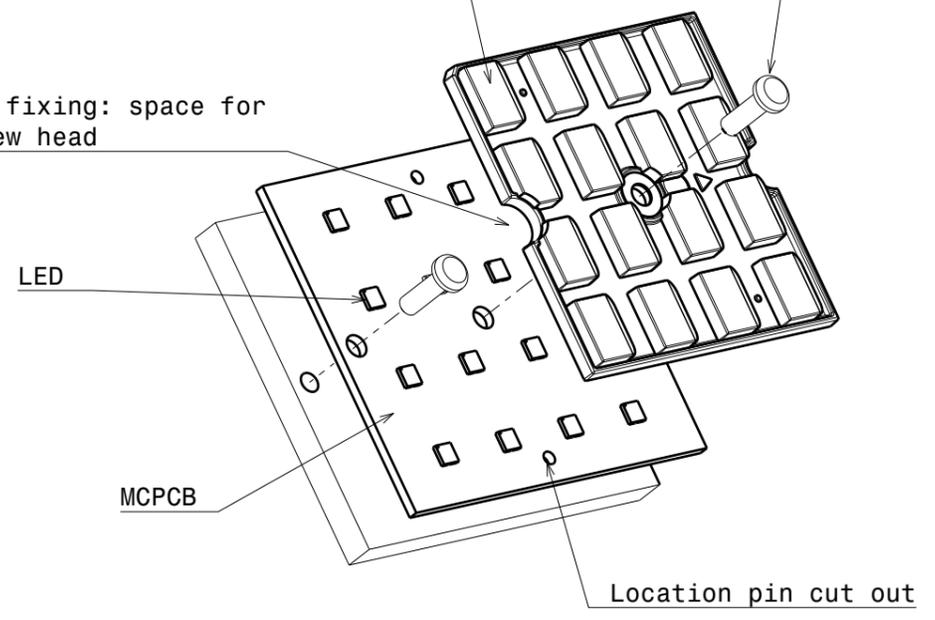

Hole to PCB:
one round min. dia 2mm,
other to be elongated.

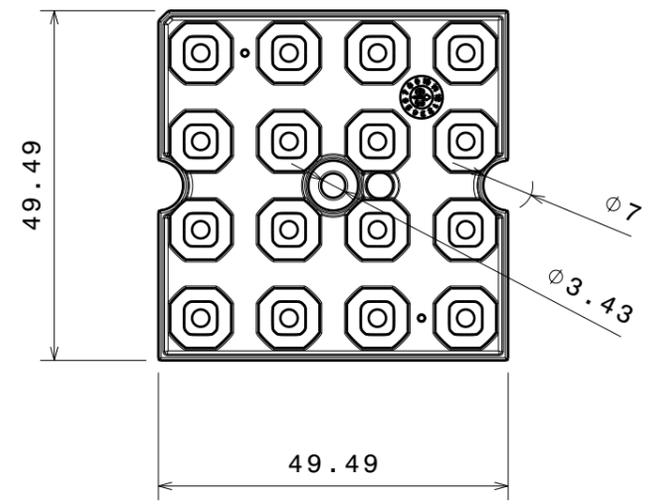

Det E

Det D
Location Pin

PART	TYPE	MATERIAL	COLOR / COATING
C16799_STRADELLA-16-HB-W2	LENS	PMMA	CLEAR


MECHANICAL DRAWING

PRODUCT
STRADELLA



Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.
Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

SCALE	1:1	WEIGHT	5.2 g	A3	SHEET 1/1
-------	-----	--------	-------	----	-----------

Notes

1	PCB or heatsink level.
2	LED location.
3	Ensure LED fitting from a product specific 3D model available from www.ledil.com .