


# CCB021M12FM3, CCB021M12FM3T

1200 V, 21 mΩ, Silicon Carbide, Six-Pack Module

<b>V<sub>DS</sub></b>	<b>1200 V</b>
<b>R<sub>DS(on)</sub></b>	<b>21 mΩ</b>

## Technical Features

- Ultra-Low Loss
- High Frequency Operation
- Zero Turn-Off Tail Current from MOSFET
- Normally-Off, Fail-Safe Device Operation
- Optional Pre-Applied Thermal Interface Material

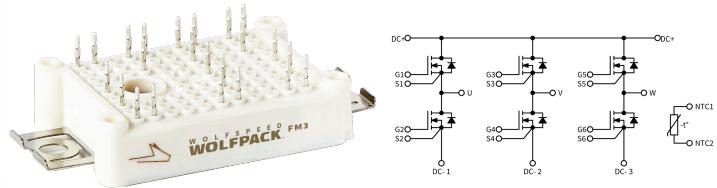

## Applications

- DC-DC Converters
- EV Chargers
- High-Efficiency Converters / Inverters
- Renewable Energy
- Smart-Grid / Grid-Tied Distributed Generation

## System Benefits

- Enables Compact, Lightweight Systems
- Increased System Efficiency, due to Low Switching & Conduction Losses of SiC
- Reduced Thermal Requirements and System Cost

## Maximum Parameters (Verified by Design)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions	Note
Drain-Source Voltage	V <sub>DS</sub>			1200	V		
Gate-Source Voltage, Maximum Value	V <sub>GS max</sub>	-8		+19		Transient, < 100 ns	Fig. 33
Gate-Source Voltage, Recommended	V <sub>GS op</sub>	-4		+15		Static	
DC Continuous Drain Current (T <sub>VJ</sub> ≤ 150 °C)	I <sub>D</sub>			30	A	V <sub>GS</sub> = 15 V, T <sub>HS</sub> = 50 °C, T <sub>VJ</sub> ≤ 150 °C	Fig. 20
DC Continuous Drain Current (T <sub>VJ</sub> ≤ 175 °C)				30		V <sub>GS</sub> = 15 V, T <sub>HS</sub> = 50 °C, T <sub>VJ</sub> ≤ 175 °C	
DC Source-Drain Current (Body Diode)	I <sub>SD BD</sub>		28			V <sub>GS</sub> = -4 V, T <sub>HS</sub> = 50 °C, T <sub>VJ</sub> ≤ 175 °C	
Pulsed Drain Current	I <sub>D (pulsed)</sub>			60		t <sub>pmax</sub> limited by T <sub>VJmax</sub> V <sub>GS</sub> = 15 V, T <sub>HS</sub> = 50 °C	
Virtual Junction Temperature	T <sub>VJ op</sub>	-40		150		Operation	
		-40		175	°C	Intermittent with Reduced Life	

**MOSFET Characteristics (Per Position) ( $T_{VJ} = 25^\circ\text{C}$  unless otherwise specified)**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions	Note	
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	1200			V	$V_{GS} = 0\text{ V}, T_{VJ} = -40^\circ\text{C}$		
Gate Threshold Voltage	$V_{GS(\text{th})}$	1.8	2.5	3.6		$V_{DS} = V_{GS}, I_D = 18\text{ mA}$		
			2.0			$V_{DS} = V_{GS}, I_D = 18\text{ mA}, T_{VJ} = 150^\circ\text{C}$		
Zero Gate Voltage Drain Current	$I_{DSS}$		1	25	$\mu\text{A}$	$V_{GS} = 0\text{ V}, V_{DS} = 1200\text{ V}$		
Gate-Source Leakage Current	$I_{GSS}$		10	250	$\text{nA}$	$V_{GS} = 15\text{ V}, V_{DS} = 0\text{ V}$		
Drain-Source On-State Resistance (Devices Only)	$R_{DS(\text{on})}$		21.0	27.9	$\text{m}\Omega$	$V_{GS} = 15\text{ V}, I_D = 30\text{ A}$	Fig. 2 Fig. 3	
			32.6			$V_{GS} = 15\text{ V}, I_D = 30\text{ A}, T_{VJ} = 150^\circ\text{C}$		
			38.0			$V_{GS} = 15\text{ V}, I_D = 30\text{ A}, T_{VJ} = 175^\circ\text{C}$		
Transconductance	$g_{fs}$		26.1		S	$V_{DS} = 20\text{ V}, I_D = 30\text{ A}$	Fig. 4	
			25.9			$V_{DS} = 20\text{ V}, I_D = 30\text{ A}, T_{VJ} = 150^\circ\text{C}$		
Turn-On Switching Energy, $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$ $T_{VJ} = 150^\circ\text{C}$	$E_{on}$	0.50 0.55 0.62			mJ	$V_{DD} = 600\text{ V},$ $I_D = 30\text{ A},$ $V_{GS} = -4\text{ V}/15\text{ V},$ $R_{G(OFF)} = 0.0\text{ }\Omega, R_{G(ON)} = 0.0\text{ }\Omega,$ $L = 45.1\text{ }\mu\text{H}$	Fig. 11 Fig. 13	
Turn-Off Switching Energy, $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$ $T_{VJ} = 150^\circ\text{C}$	$E_{off}$	0.020 0.035 0.044						
Internal Gate Resistance	$R_{G(\text{int})}$		3.3		$\Omega$	$f = 100\text{ kHz}, V_{AC} = 25\text{ mV}$		
Input Capacitance	$C_{iss}$		4.9		$\text{nF}$	$V_{GS} = 0\text{ V}, V_{DS} = 800\text{ V},$ $V_{AC} = 25\text{ mV}, f = 100\text{ kHz}$	Fig. 9	
Output Capacitance	$C_{oss}$		209		$\text{pF}$			
Reverse Transfer Capacitance	$C_{rss}$		16					
Gate to Source Charge	$Q_{GS}$		49		nC	$V_{DS} = 800\text{ V}, V_{GS} = -4\text{ V}/15\text{ V},$ $I_D = 40\text{ A},$ Per IEC60747-8-4 pg 21		
Gate to Drain Charge	$Q_{GD}$		50					
Total Gate Charge	$Q_G$		162					
FET Thermal Resistance, Junction to Heatsink	$R_{th JHS}$		1.032		$^\circ\text{C/W}$	Measured with Pre-Applied TIM	Fig. 17	

**Diode Characteristics (Per Position) ( $T_{VJ} = 25^\circ\text{C}$  unless otherwise specified)**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions	Notes
Body Diode Forward Voltage	$V_{SD}$		5.3		V	$V_{GS} = -4\text{ V}, I_{SD} = 30\text{ A}$	Fig. 7
			4.8			$V_{GS} = -4\text{ V}, I_{SD} = 30\text{ A}, T_{VJ} = 150^\circ\text{C}$	
Reverse Recovery Time	$t_{RR}$		16		ns	$V_{GS} = -4\text{ V}, I_{SD} = 30\text{ A}, V_R = 600\text{ V},$ $di/dt = 16.0\text{ A/ns}, T_{VJ} = 150^\circ\text{C}$	Fig. 32
Reverse Recovery Charge	$Q_{RR}$		1.30		$\mu\text{C}$		
Peak Reverse Recovery Current	$I_{RRM}$		135		A		
Reverse Recovery Energy, $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$ $T_{VJ} = 150^\circ\text{C}$	$E_{RR}$	0.14 0.20 0.25			mJ	$V_{DD} = 600\text{ V}, I_D = 30\text{ A},$ $V_{GS} = -4\text{ V}/15\text{ V}, R_{G(ON)} = 0.0\text{ }\Omega,$ $L = 45.1\text{ }\mu\text{H}$	Fig. 14



## Module Physical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Package Resistance, M1 (High-Side)	R <sub>HS</sub>		5.90		mΩ	T <sub>C</sub> = 125°C, I <sub>D</sub> = 30 A, Note 1
Package Resistance, M2 (Low-Side)	R <sub>LS</sub>		8.10			T <sub>C</sub> = 125°C, I <sub>D</sub> = 30 A, Note 1
Stray Inductance	L <sub>Stray</sub>		17.4		nH	Between DC- and DC+, f = 10 MHz
Case Temperature	T <sub>C</sub>	-40		125	°C	
Mounting Torque	M <sub>S</sub>		2.0	2.3	N·m	M4 bolts
Weight	W		21		g	
Case Isolation Voltage	V <sub>isol</sub>	3			kV	AC, 50 Hz, 1 minute
Comparative Tracking Index	CTI	200				
Clearance Distance			5.0		mm	Terminal to Terminal
			10.0			Terminal to Heatsink
Creepage Distance			6.3			Terminal to Terminal
			11.5			Terminal to Heatsink







Notes:

<sup>1</sup>Total Effective Resistance (Per Switch Position) = MOSFET R<sub>DS(on)</sub> + Switch Position Package Resistance


## NTC Thermistor Characterization

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Rated Resistance	R <sub>NTC</sub>		5.0		kΩ	T <sub>NTC</sub> = 25°C
Resistance Tolerance at 25 °C	ΔR/R	-5		5	%	
Beta Value (T <sub>2</sub> = 50 °C)	β <sub>25/50</sub>		3380		K	
Beta Value (T <sub>2</sub> = 80 °C)	β <sub>25/80</sub>		3468		K	
Beta Value (T <sub>2</sub> = 100 °C)	β <sub>25/100</sub>		3523		K	
Power Dissipation	P <sub>Max</sub>			10	mW	T <sub>NTC</sub> = 25°C


## Typical Performance

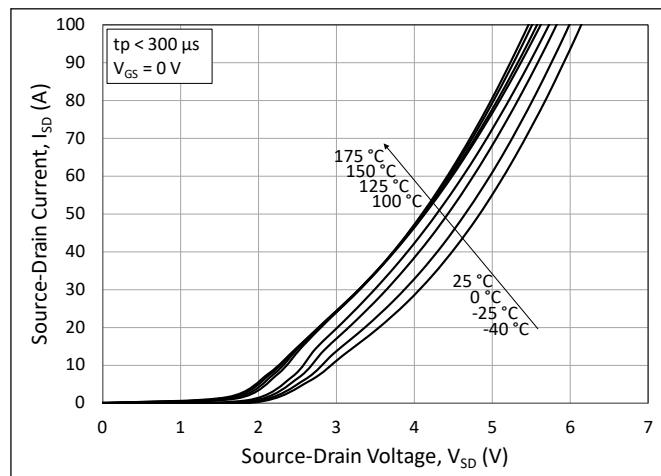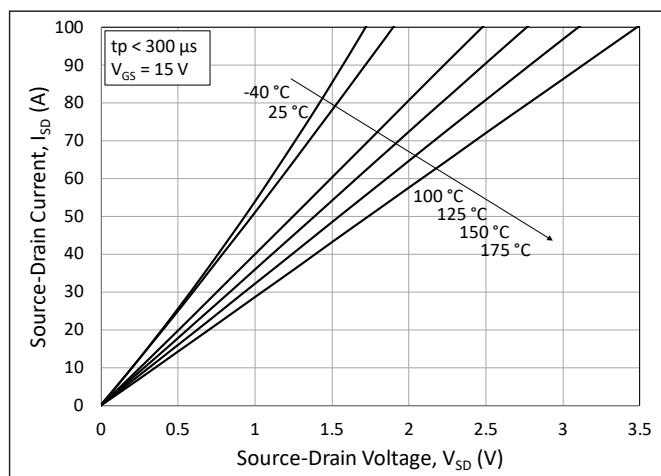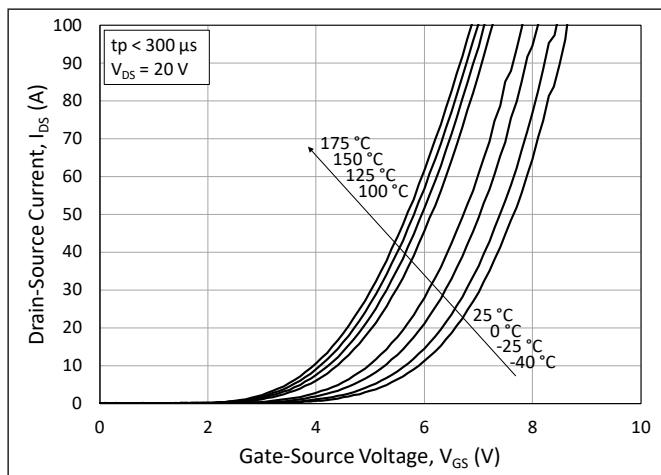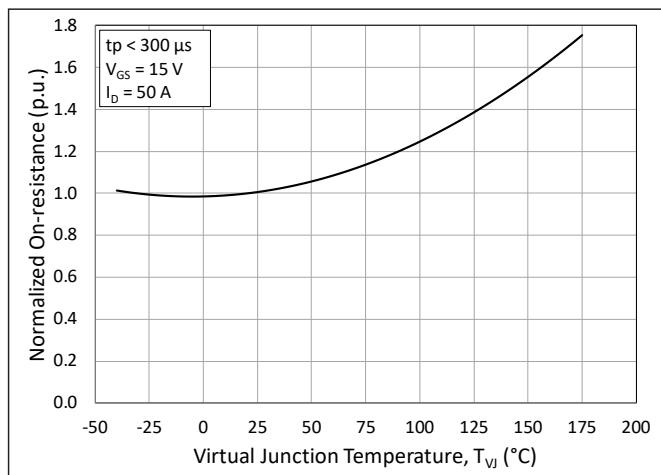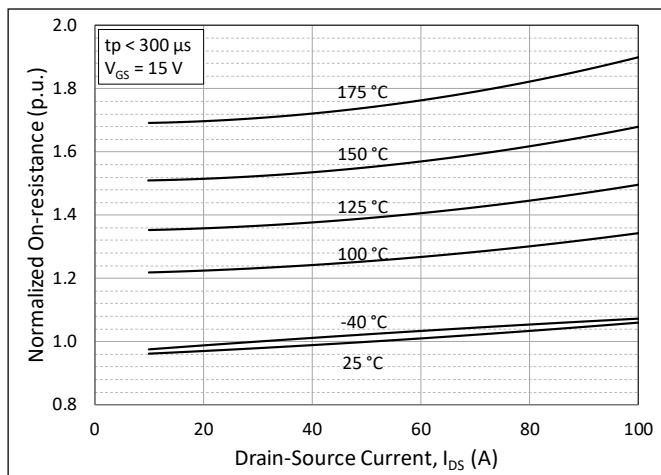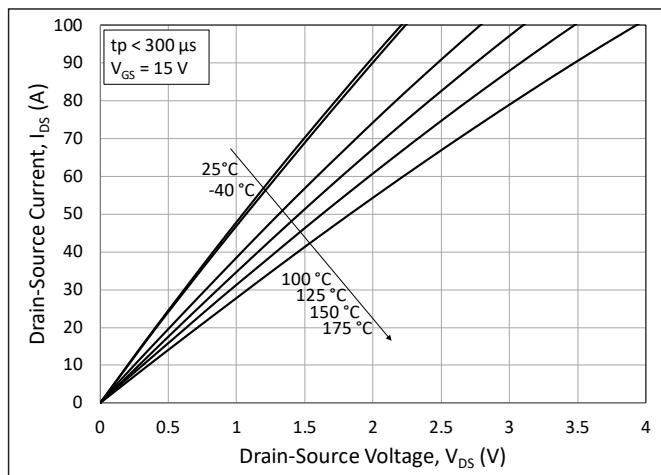


## Typical Performance

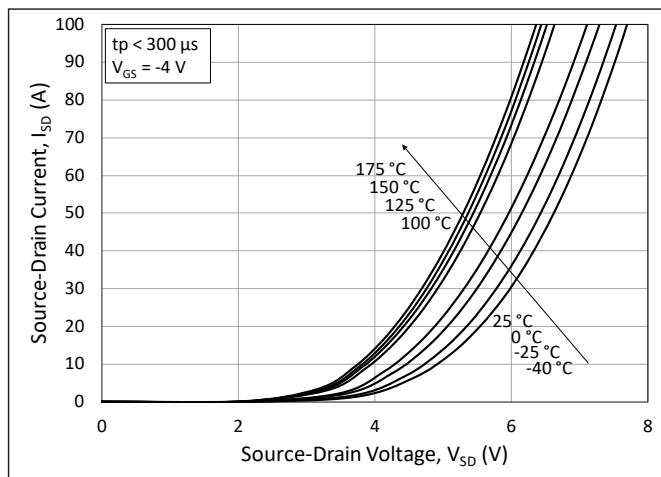


**Figure 7.** 3<sup>rd</sup> Quadrant Characteristic vs. Junction Temperature at  $V_{GS} = -4 \text{ V}$  (Body Diode)

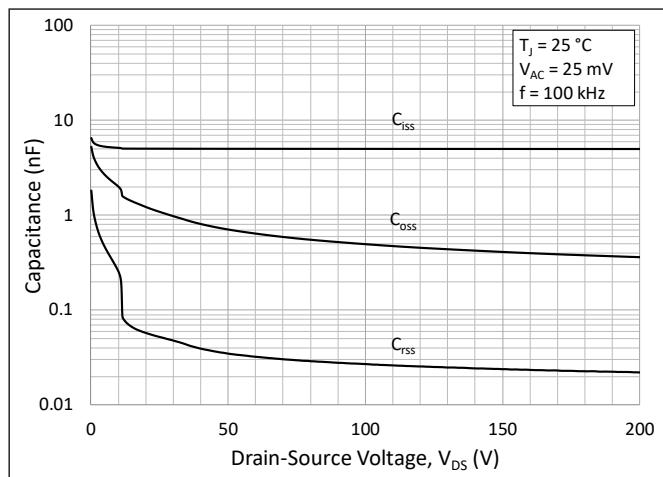


**Figure 8.** Typical Capacitances vs. Drain to Source Voltage (0 - 200 V)

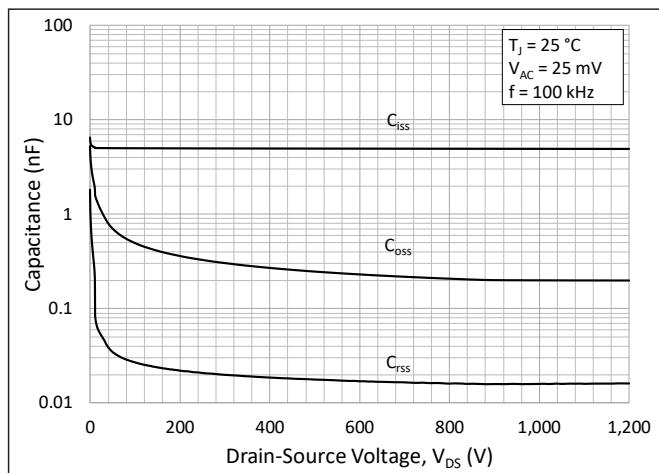


**Figure 9.** Typical Capacitances vs. Drain to Source Voltage (0 - 1200 V)

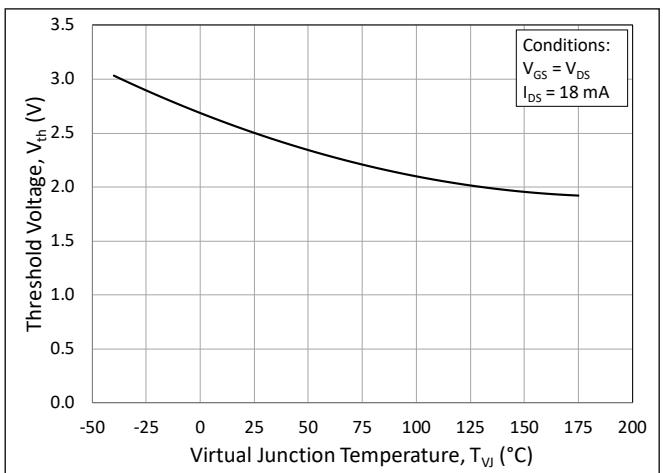

**Figure 10.** Threshold Voltage vs. Junction Temperature






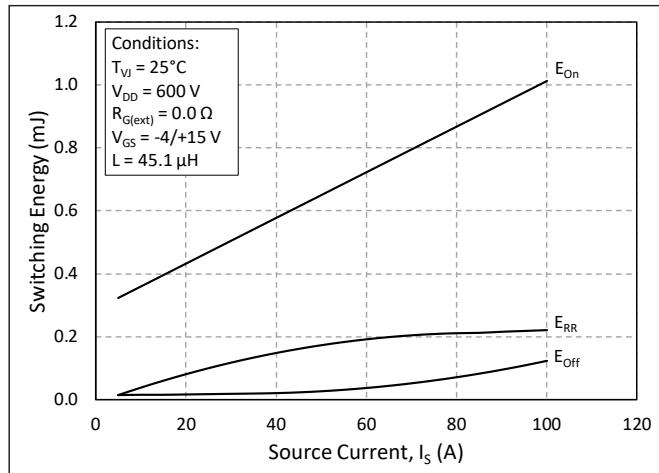


**Figure 11.** Switching Energy vs. Drain Current ( $V_{DD} = 600 \text{ V}$ )

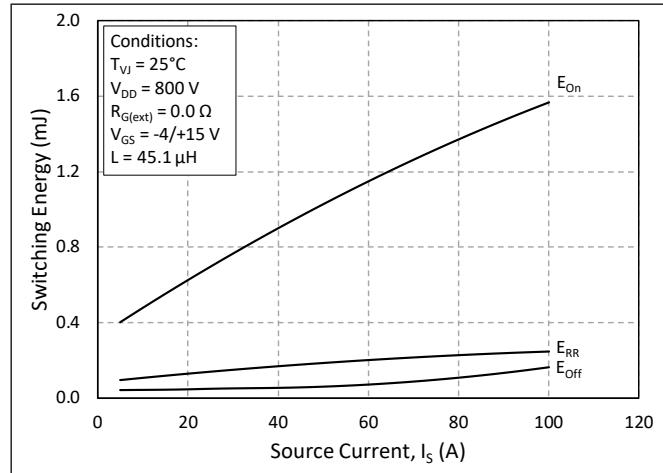


**Figure 12.** Switching Energy vs. Drain Current ( $V_{DD} = 800 \text{ V}$ )


## Typical Performance

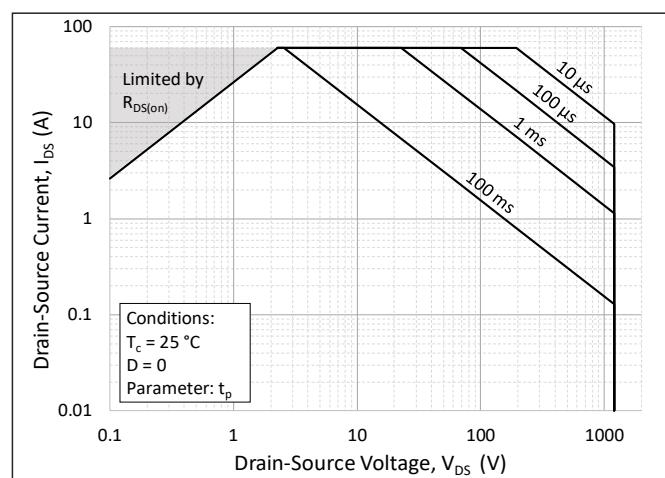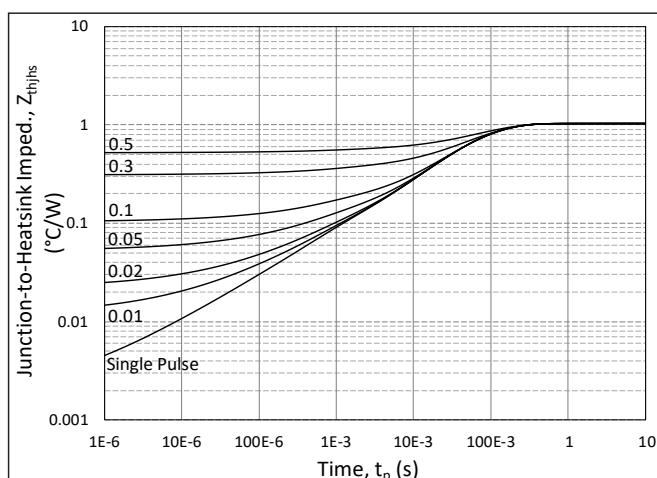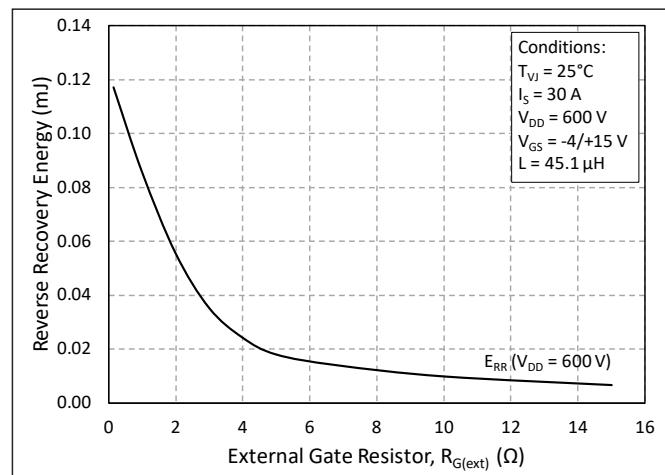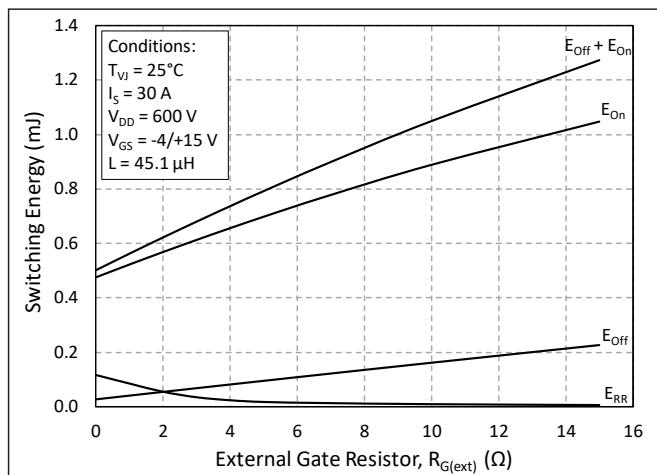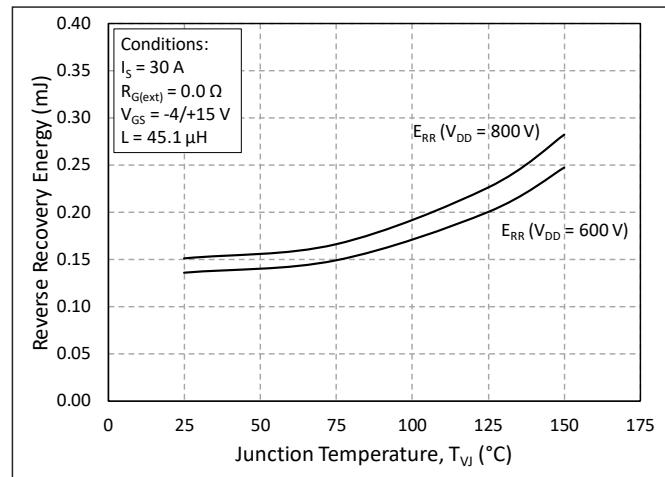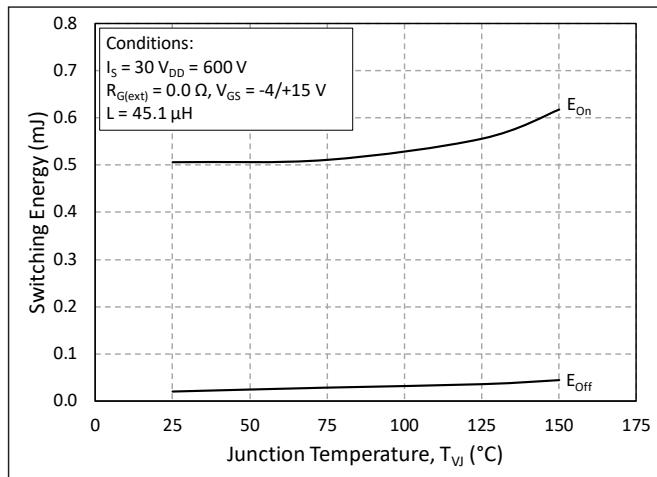


## Typical Performance

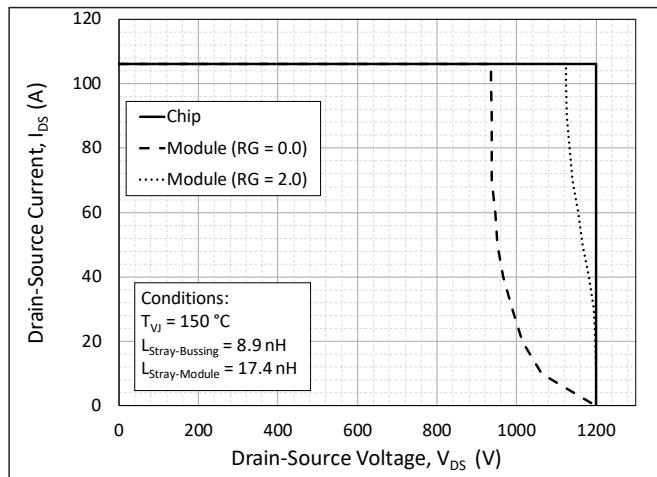


**Figure 19.** Switching Safe Operating Area

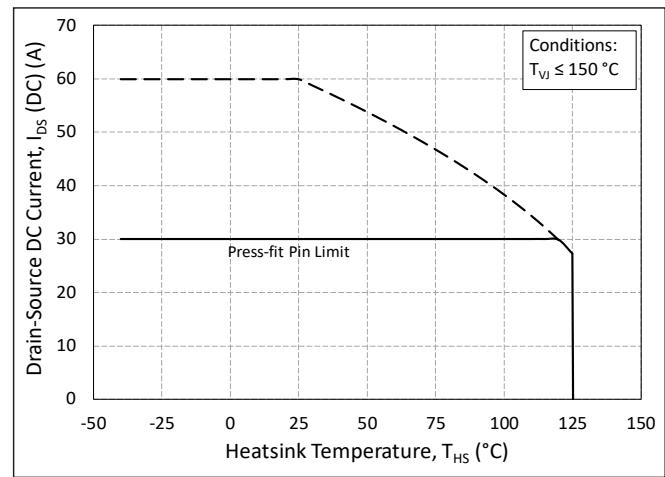


**Figure 20.** Continuous Drain Current Derating vs. Heatsink Temperature

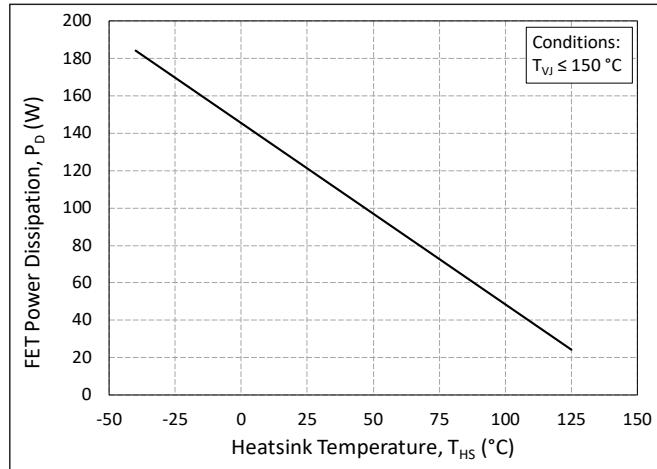

**Figure 21.** Maximum Power Dissipation Derating vs. Heatsink Temperature






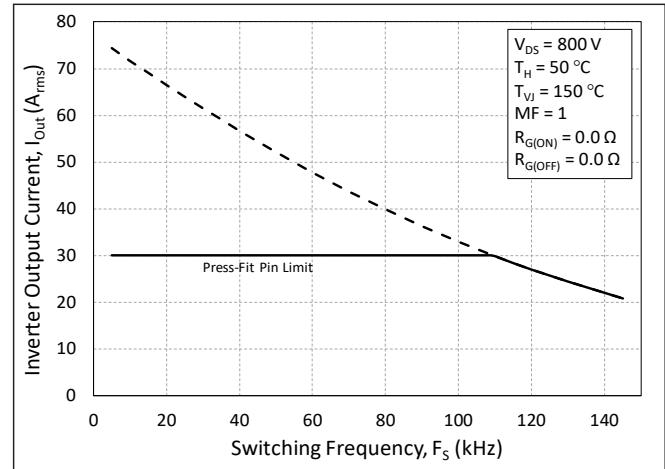


**Figure 22.** Typical Output Current Capability vs. Switching Frequency (Inverter Application)

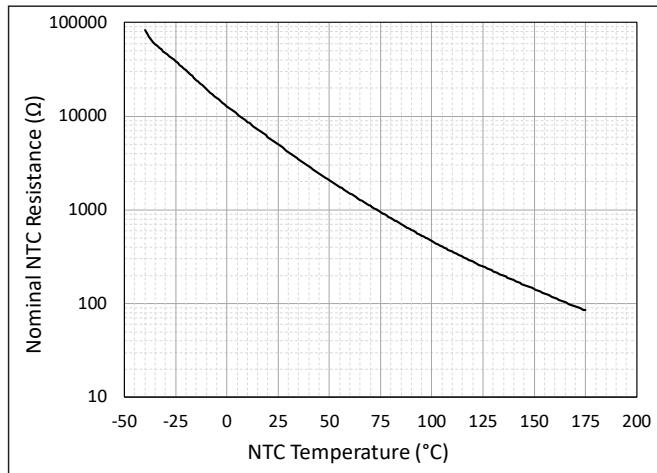


**Figure 23.** Nominal NTC Resistance vs. NTC Temperature


## Timing Characteristics

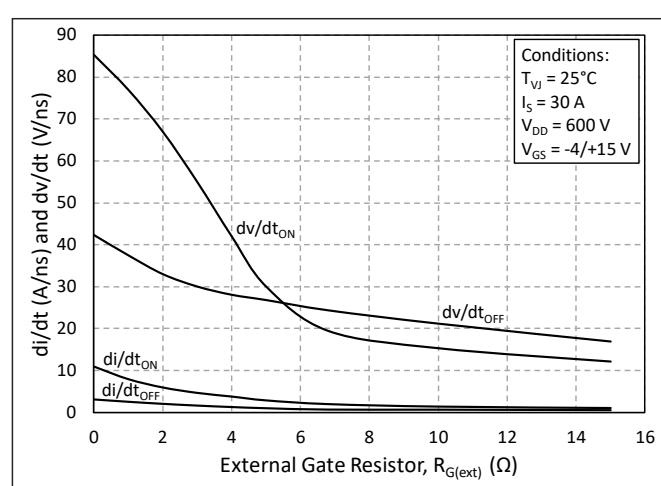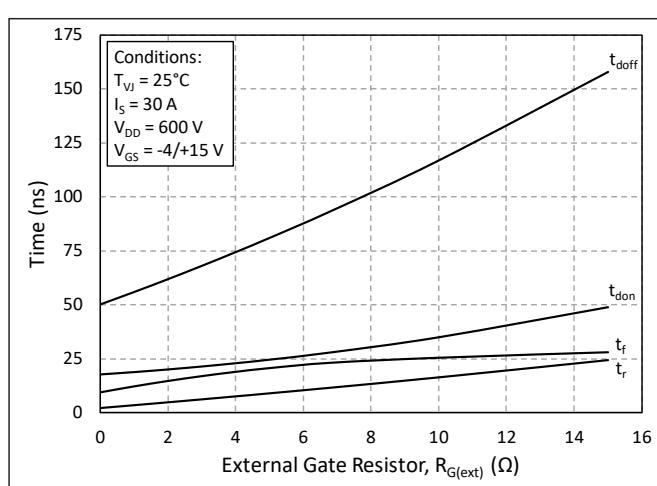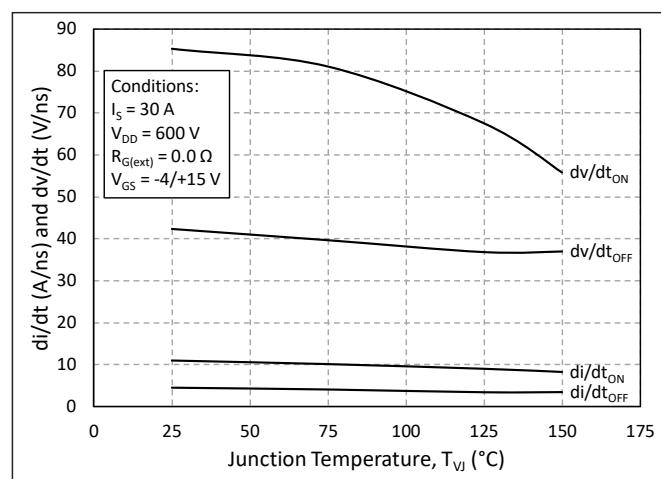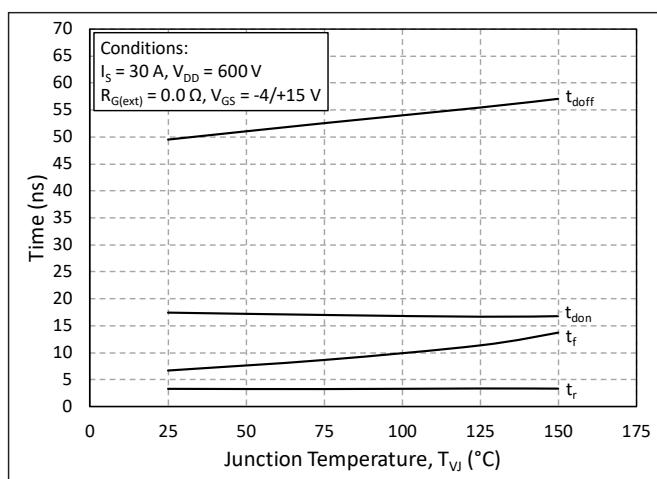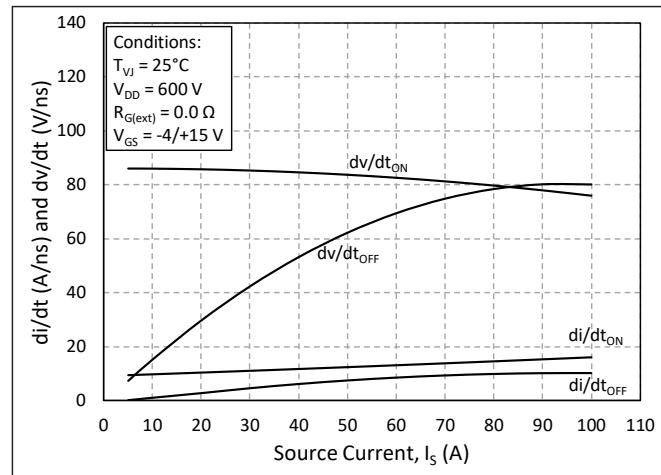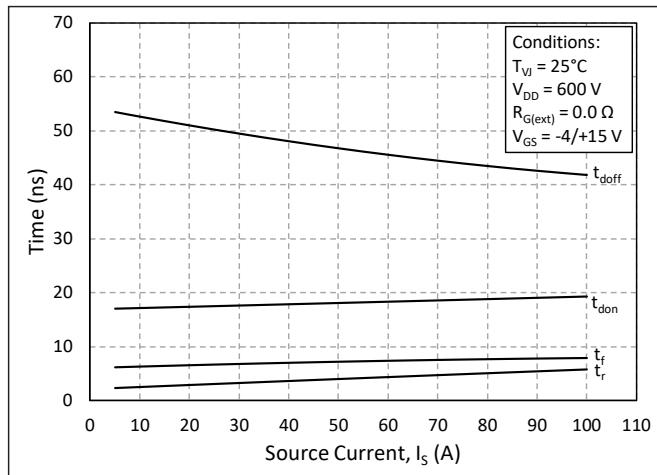


## Definitions

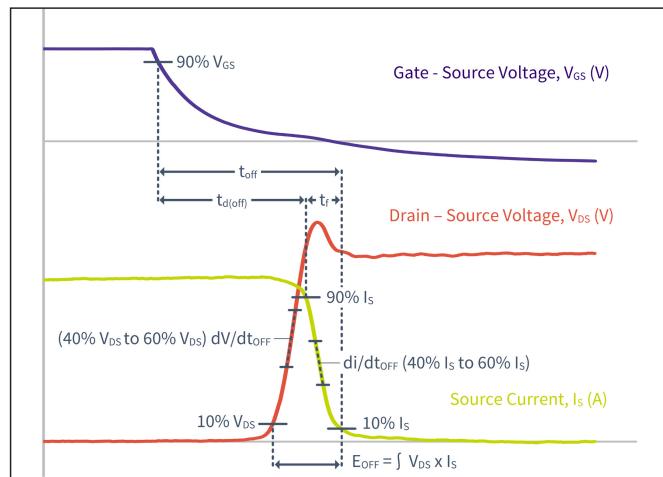


**Figure 30.** Turn-off Transient Definitions

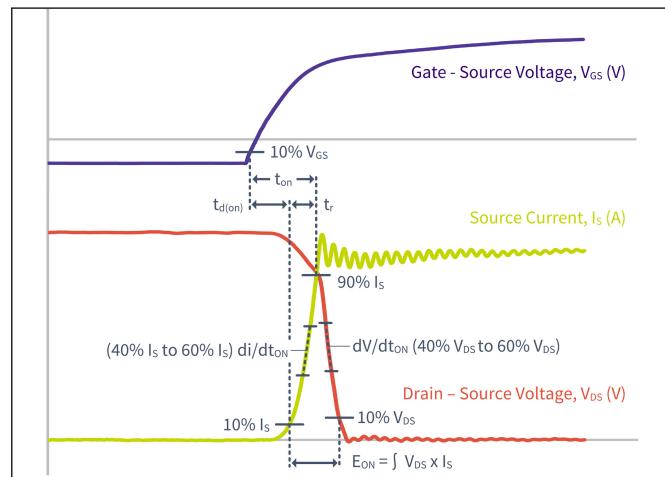

**Figure 31.** Turn-on Transient Definitions

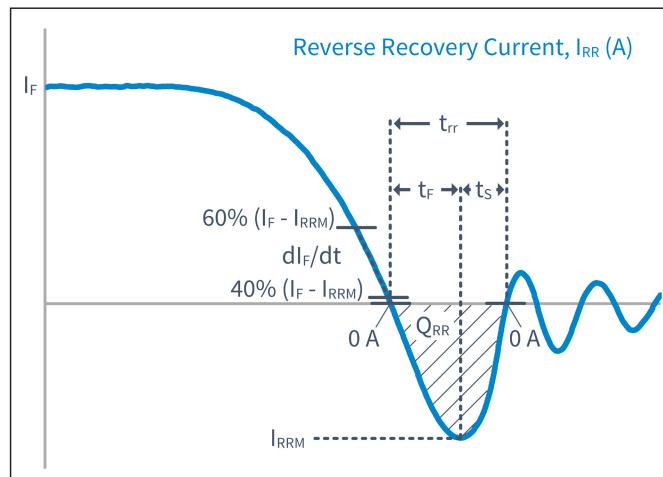


**Figure 32.** Reverse Recovery Definitions

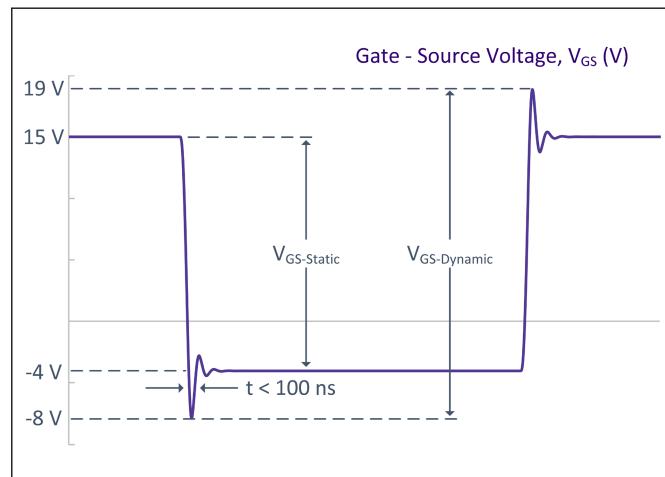


**Figure 33.** VGS Transient Definitions

## Pinout

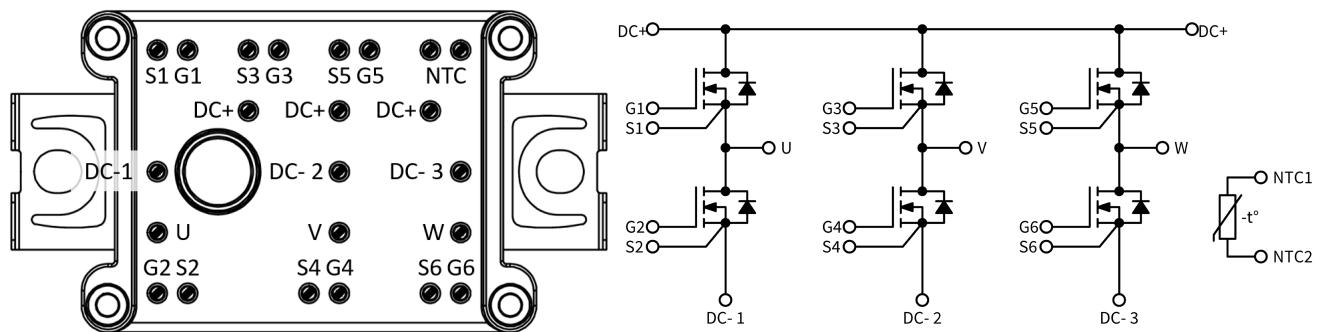

## Package Dimension (mm)

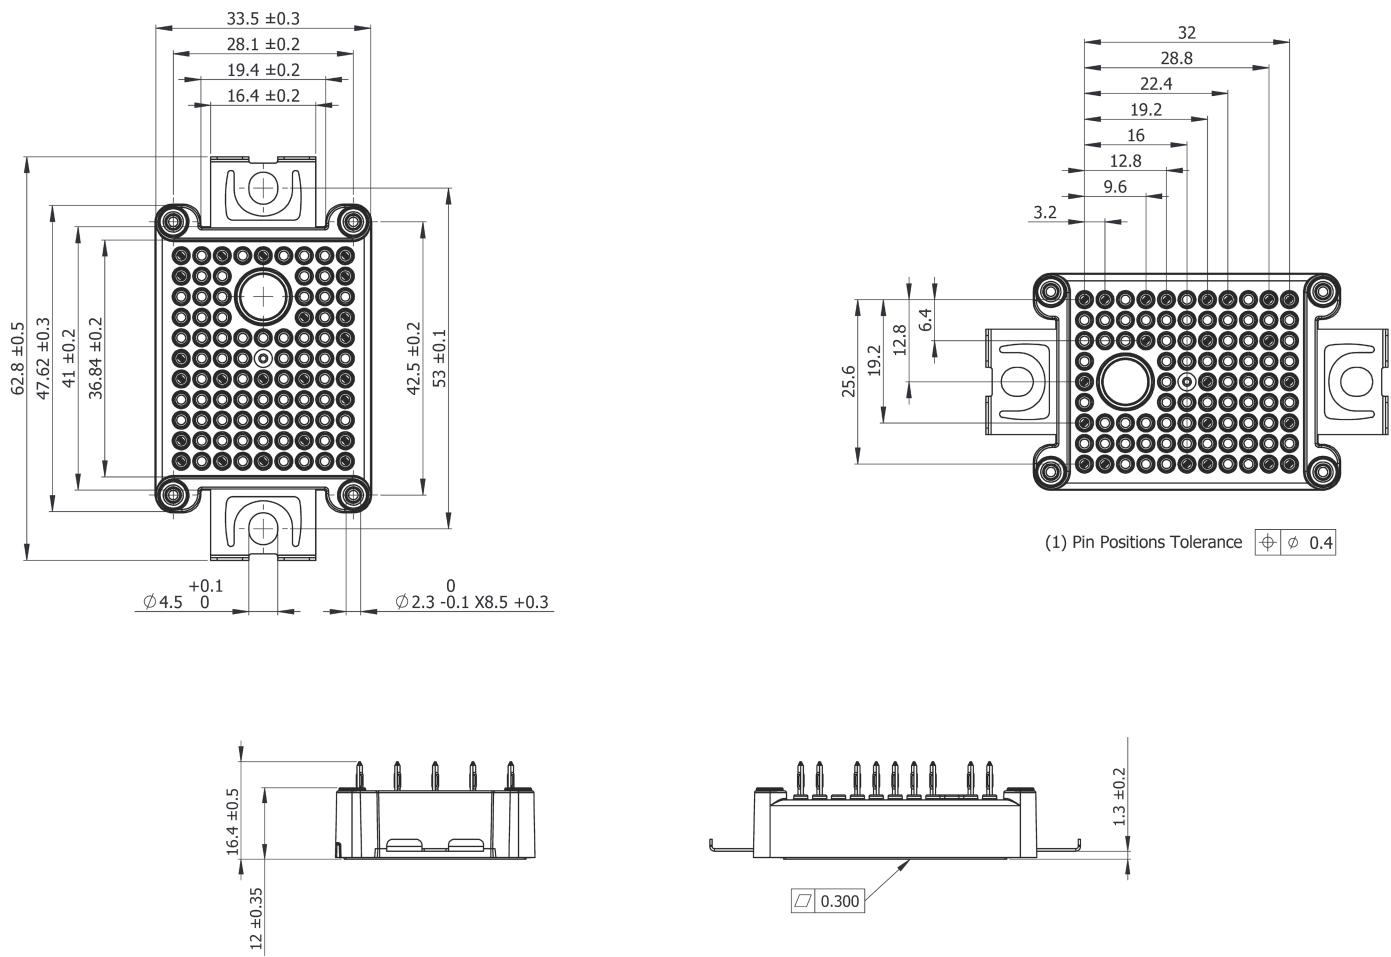



## Product Ordering Code

Part Number	Description
CCB021M12FM3	Without Pre-Applied Phase Change Thermal Interface Material
CCB021M12FM3T	With Pre-Applied Phase Change Thermal Interface Material

## Supporting Links & Tools

### Evaluation Tools & Support

- [KIT-CRD-CIL12N-FMC: Dynamic Evaluation Board for Six-Pack FM3 Modules](#)
- [CCB021M12FM3 PLECS Model](#)
- [SpeedFit 2.0 Design Simulator™](#)
- [Technical Support Forum](#)

### Dual-Channel Gate Driver Board

- [EVAL-ADUM4146WHB1Z: Analog Devices® Gate Driver Board](#)
- [Si823H-AxWA-KIT: Skyworks® Gate Driver Board](#)
- [ACPL-355JC: Broadcom® Gate Driver Board](#)
- [CGD1700HB2M-UNA: Wolfspeed Gate Driver Board](#)
- [CGD12HB00D: Differential Transceiver Daughter Board Companion Tool for Differential Gate Drivers](#)

### Application Notes

- [CPWR-AN41: Mounting Instructions and PCB Requirements](#)
- [CPWR-AN42: Thermal Interface Material Application Note](#)
- [CPWR-AN45: Dynamic Performance Application Note](#)



## Notes & Disclaimer

This document and the information contained herein are subject to change without notice. Any such change shall be evidenced by the publication of an updated version of this document by Wolfspeed. No communication from any employee or agent of Wolfspeed or any third party shall effect an amendment or modification of this document. No responsibility is assumed by Wolfspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfspeed.

Notwithstanding any application-specific information, guidance, assistance, or support that Wolfspeed may provide, the buyer of this product is solely responsible for determining the suitability of this product for the buyer's purposes, including without limitation for use in the applications identified in the next bullet point, and for the compliance of the buyers' products, including those that incorporate this product, with all applicable legal, regulatory, and safety-related requirements.

This product has not been designed or tested for use in, and is not intended for use in, applications in which failure of the product would reasonably be expected to cause death, personal injury, or property damage, including but not limited to equipment implanted into the human body, life-support machines, cardiac defibrillators, and similar emergency medical equipment, aircraft navigation, communication, and control systems, aircraft power and propulsion systems, air traffic control systems, and equipment used in the planning, construction, maintenance, or operation of nuclear facilities.

### **RoHS Compliance**

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Wolfspeed representative or from the Product Documentation sections of [www.wolfspeed.com](http://www.wolfspeed.com).

### **REACH Compliance**

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact your Wolfspeed representative to ensure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

### **Contact info:**

4600 Silicon Drive  
Durham, NC 27703 USA  
Tel: +1.919.313.5300  
[www.wolfspeed.com/power](http://www.wolfspeed.com/power)