REVISION B

5/21/2008 | ECN-91386

RECOMMENDED PCB LAYOUT FOR MPT-XX-XX-X-RA-XX-FOOTPRINT

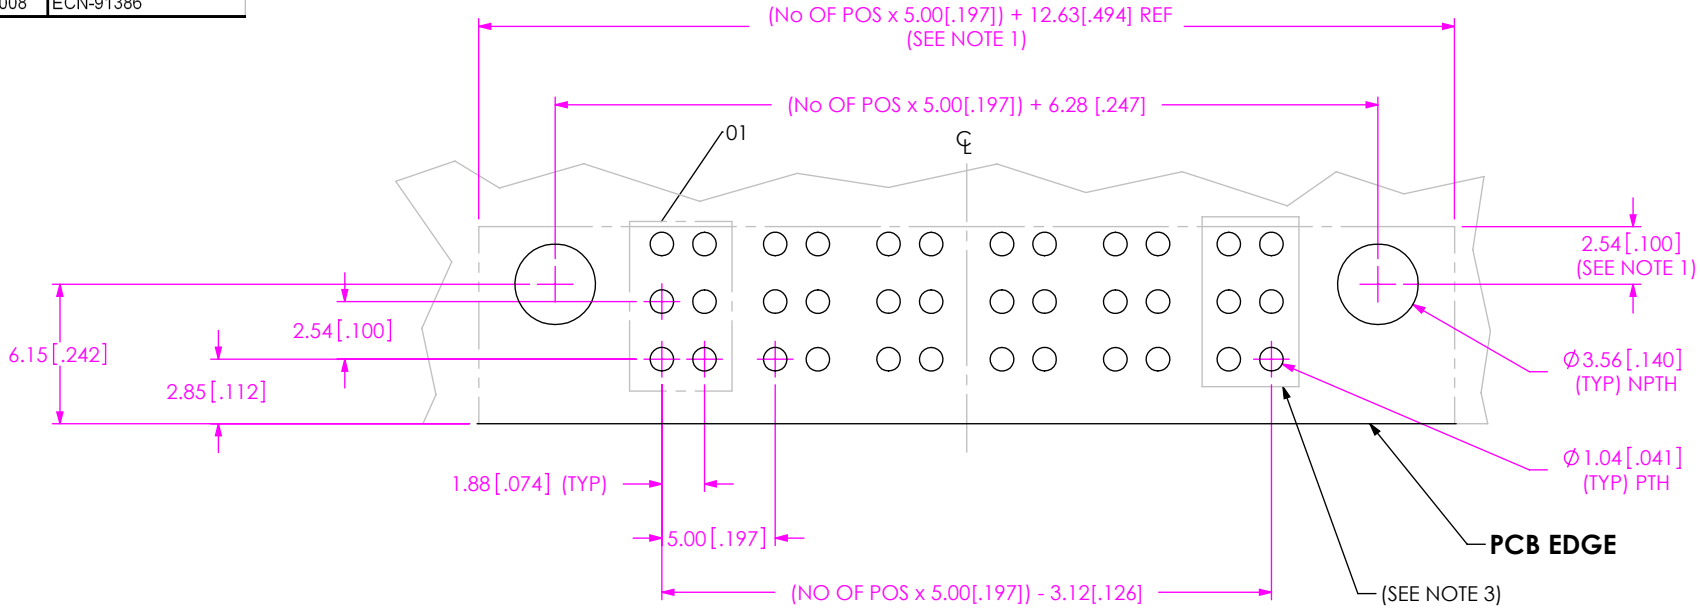

FIG. 1
PCB LAYOUT FOR MPT-XX-XX-X-RA-SD SHOWN

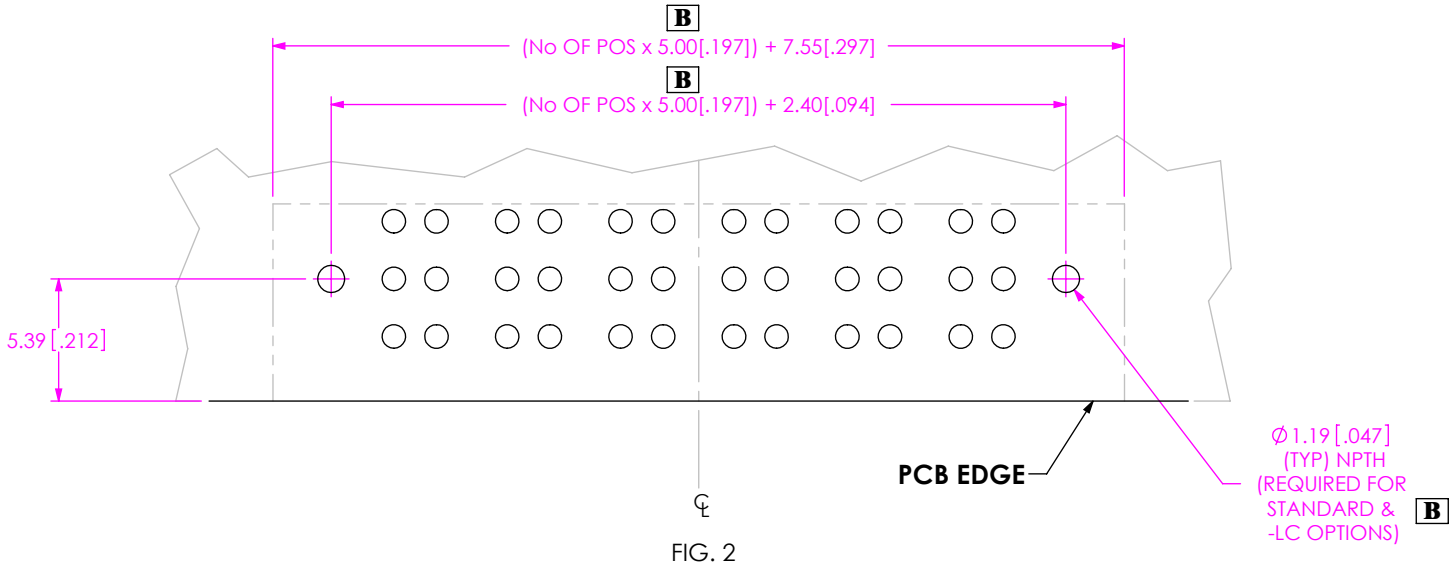

FIG. 2
PCB LAYOUT FOR MPT-XX-XX-X-RA-LC SHOWN
(SAME AS FIG. 1, UNLESS OTHERWISE STATED)

NOTES:
1. CONNECTOR ENVELOPE DIMENSIONS. OTHER COMPONENTS PLACED ON PCB SHALL AVOID THIS ZONE.
2. ALL DIMENSIONS ARE SYMMETRIC ABOUT THE CENTERLINE.
3. EACH GROUP HOLDS ONE POWER PIN.
4. A CARRIER TAB FOR WAVE SOLDERING IS RECOMMENDED.

DESIGNED & DIMENSIONED IN MILLIMETERS

F:\DWG\MISC\Mktg\MPT-XX-XX-X-RA-XX-FOOTPRINT.SLDDRW

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322