

Low Profile / Low PIM Ceiling Mount Antenna



Patent Pending CLS69273P

MULTI-BAND LOW PIM CEILING MOUNTED OMNIDIRECTIONAL ANTENNA

The CLS69273P is an Low PIM indoor wideband omnidirectional low profile ceiling mount antenna. It is designed to provide pattern coverage that is optimized for indoor coverage requirements at 698-960 MHz, and 1695-2700 MHz for the GSM, DCS, UMTS, and LTE/WiMAX frequency bands. The antenna features a pattern that has been specifically shaped to provide optimal performance from a ceiling mount location. The pattern is also very uniform and symmetrical, providing system integrators with the ability to precisely determine cell size.

FEATURES

- Low profile aesthetically neutral housing
- Mounts directly and easily to ceiling tile
- Performance optimized using Laird proprietary RF optimization tools
- Excellent flame rating

MARKETS / APPLICATIONS

- Small Cells
- Meeting rooms
- Offices
- Hotels
- Museums
- iDAS
- Libraries
- Retail malls
- Bus terminals & train stations
- Other in-building areas

STANDARD CEILING MOUNT



Twist & Lock Ceiling Mount:HKIT-CMx-003

OPTIONAL CEILING MOUNTS



Above Ceiling Mount:HKIT-CMx-001



Hard Ceiling Mount: HKIT-CMx-002



Above Ceiling Mount - Foam Standoff w/Adhesive:
HKIT-CMx-004

PARAMETERS	SPECIFICATIONS									
Frequency Bands, MHz	698-806	824-894	880-960	1695-1880	1850-1990	1910-2170	2300-2500	2500-2700		
Peak Gain, dBi (Typ)	2.7	2.6	3.5	5.4	6.4	6.5	6.2	6.8		
Peak Gain, dBi (Max)	3.0	3.0	4.1	5.6	7.0	7.0	6.7	7.3		
VSWR, Typ	<1.8:1	<1.6:1	<1.7:1	<1.9:1	<1.9:1	<1.7:1	<1.5:1	<1.3:1		
VSWR, Max	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1	<2.0:1		
PIM, 3rd Order, 2 x 20 Watt (Typ)	< -156 dBc			< -156 dBc						
PIM, 3rd Order, 2 x 20W (Max)	< -150 dBc			< -150 dBc						
Nominal Impedance				50Ω						
Polarization				Vertical						
Max Power (Ambient 25°C)				50 Watts						
Azimuth Beamwidth				Omnidirectional						
Antenna Dimension (Dia x Ht)				250 x 47.5 mm (9.84" x 1.87")						
Weight				Approx. 0.45 kg (0.99 lbs)						
Operating Temperature				-30°C to +70°C						
Storage Temperature				-40°C to +85°C						
Radome				PC / ABS, White						
Mounting				Ceiling mount (drywall or tile flush mount)						
Flammability Rating (Radome)				UL94 V-0 Rating						
Material Substance Compliance				RoHS						

PART NUMBER	CABLE LENGTH	CONNECTOR
CLS69273P-30NF	30 cm (12")	Type N- female
CLS69273P-30D41F	30 cm (12")	4.1-9.5 female
CLS69273P-30D43F	30 cm (12")	4.3-10 female
CLS69273P-B30NF	30 cm (12")	Type N- female
CLS69273P-B30D41F	30 cm (12")	4.1-9.5 female
CLS69273P-B30D43F	30 cm (12")	4.3-10 female

Americas: +1.847.839.6925
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941
IAS-EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

Laird warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations Laird will, at its option, either repair or replace any part of its products that prove defective by reason of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the Laird product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.





Smart Technology. Delivered.


CLS69273P

698-960 MHz/1695-2700 MHz


Low Profile / Low PIM Ceiling Mount Antenna

PATTERNS


698 MHz

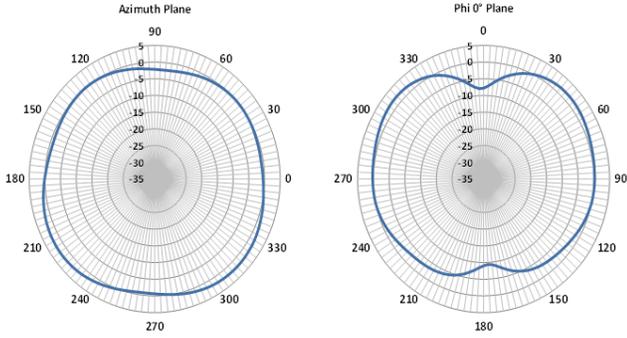


824 MHz

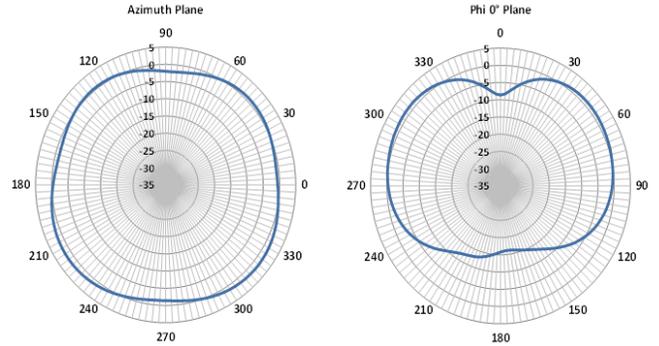


960 MHz

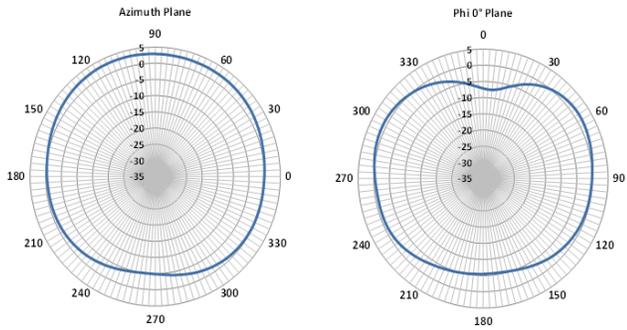


1710 MHz

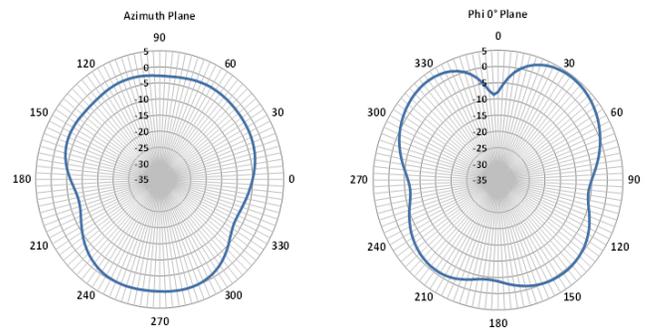



1880 MHz

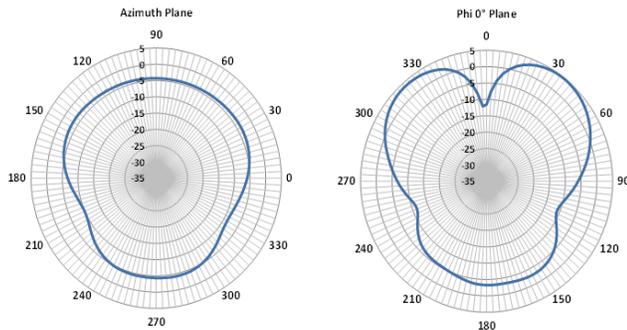



2110 MHz

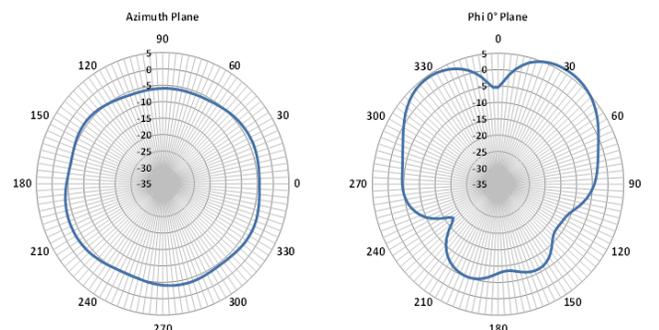

2305 MHz



2507 MHz



2700 MHz

