
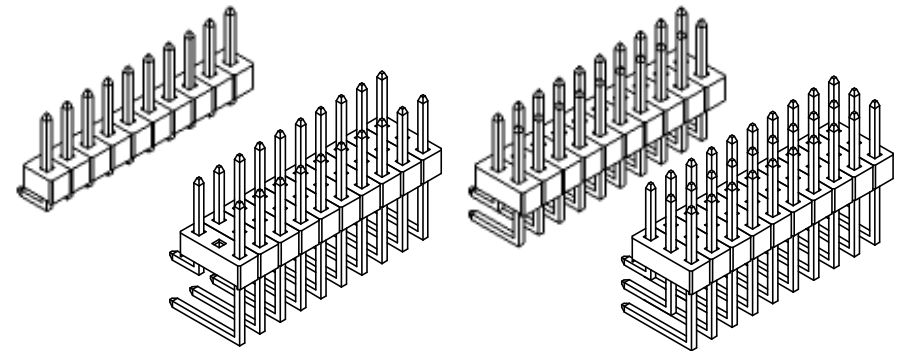




Recommended P.C. Board Layout
SCALE 4:1

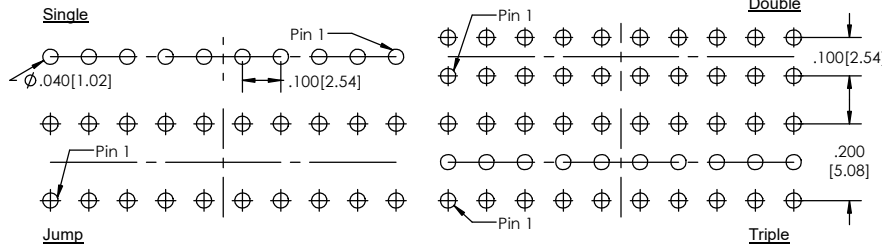



TSHR-1 **XX** - **X** - **XX** - **X** - **XX** - **XX** - **XXX** - **X** - **LF**
(A) **(B)** **(C)** **(D)** **(E)** **(F)** **(G)** **(H)** **(I)**

- A. Pins Per Row
- 1 through 40
- B. Row Specification
- S= Single Row
- D= Double Row
- J= Jump Middle Row
- T= Triple Row
- C. Pin Options
- See Pin Options below
- D. Post Height
- A= .230[5.84]
- B= .318[8.08]
- E. Plating Options
- See Plating Options below
- F. Lock Tight "LT" (Optional)
- Leave blank if not needed
- LT= With
- G. Polarized Position
- Leave blank if not needed
- If required, specify empty pin position
- e.g. 012 for Pin 12
- H. Every Other Pin Filled (.200 Centers)
- Leave blank if not needed
- E= Filled
- I. Lead Free


Mates With:
 BCSS SMBC
 BSSH SSHQ
 BSSHC SSHQR
 BSSQ SSHR
 BSSQC SSHS
 BSSQM SSHSM
 LBCSS
 LSMBC
 LSWSS

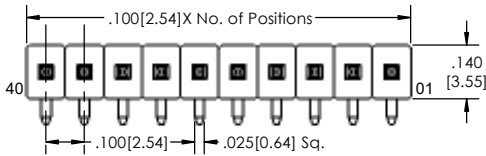



SINGLE ROW

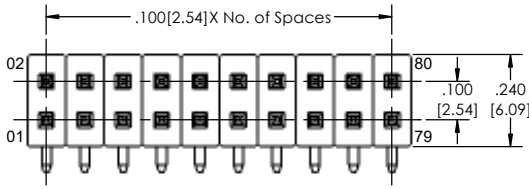



DOUBLE ROW



APPLICATION

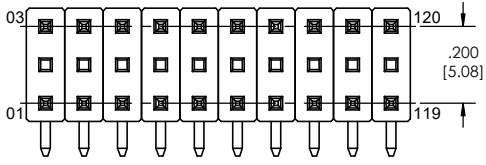

JUMP MIDDLE ROW

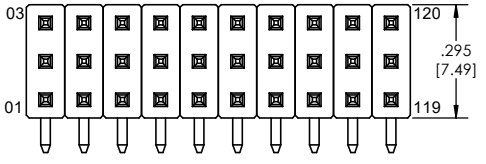

TRIPLE ROW

Plating options	
G	-10µ Gold on Contact Area/ Flash on Tail
T	-Matte Tin all Over
GT	-10µ Gold on Contact Area/ Matte Tin on Tail
H	-30µ Gold on Contact Area/ Matte Tin on Tail
F	-Gold Flash over Entire Pin
FT	-Gold Flash on Contact Area/ Matte Tin on Tail

Specifications:
 Current Rating: 3.0 Ampere
 Insulation Resistance: 1000M Ohms Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20M Ohms Max.
 Operation Temperature: -40°C to +105°C
 Max. Process Temperature
 Peak: 260°C up to 20 secs.
 Process: 230°C up to 60 secs.
 Wave: 260°C up to 6 secs.
 Manual Solder: 350°C up to 5 secs.

Materials:
 Contact Material: Phosphor Bronze
 Insulator Material: Nylon 6T
 Plating: Au or Sn over 50µ" (1.27) Ni

Pin Options		
"A" Tail-.230 Post	"B" Tail-.318 Post	
.090[2.29mm]	N/A	02
.190[4.83mm]	.102[2.59mm]	04
.290[7.37mm]	.202[5.13mm]	06
.390[9.91mm]	.302[7.67mm]	08
.490[12.45mm]	.402[10.24mm]	10
.590[14.99mm]	.502[12.75mm]	12
.690[17.53mm]	.602[15.29mm]	14
.790[20.07mm]	.702[17.83mm]	16
.890[22.61mm]	.802[20.37mm]	18
.990[25.15mm]	.902[22.91mm]	20
1.090[27.69mm]	1.002[25.45mm]	22

Tails may be clipped to achieve specific dimensions.

Products cut to specific sizes are uncancelable/ nonreturnable.
 Parts are subject to change without notice.

ROHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Major League Electronics. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Major League Electronics IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		DATE		
DIMENSIONS ARE IN INCHES		DRAWN	EWOW	01/14/14		
TOLERANCES: ONE DECIMAL ±.100 TWO DECIMAL ±.010 THREE DECIMAL ±.005 FOUR DECIMAL ±.002		CHECKED	GWE	01/14/14		
NEXT ASSY		USED ON	FINISH			
APPLICATION		DO NOT SCALE DRAWING		INTERPRET GEOMETRIC TOLERANCING PER:		ADDRESS:
				2533 Centennial Blvd. Jeffersville, In 47130 Phone: 812-670-4174 Fax: 812-670-4175 E-Mail: mle@mlelectronics.com		TITLE: TSHR-1 SERIES
				SIZE DWG. NO.		REV
				C		B
				SCALE 6:1		SHEET 1 OF 1