

January 2008

# 74LVT240, 74LVTH240 Low Voltage Octal Buffer/Line Driver with 3-STATE Outputs

#### **Features**

- Input and output interface capability to systems at 5V V<sub>CC</sub>
- Bushold data inputs eliminate the need for external pull-up resistors to hold unused inputs (74LVTH240), also available without bushold feature (74LVT240)
- Live insertion/extraction permitted
- Power Up/Down high impedance provides glitch-free bus loading
- Outputs source/sink -32mA/+64mA
- Functionally compatible with the 74 series 240
- Latch-up performance exceeds 500mA
- ESD performance:
  - Human-body model > 2000V
  - Machine model > 200V
  - Charged-device model > 1000V

# **General Description**

The LVT240 and LVTH240 are inverting octal buffers and line drivers designed to be employed as memory address drivers, clock drivers and bus oriented transmitters or receivers which provides improved PC board density.

The LVTH240 data inputs include bushold, eliminating the need for external pull-up resistors to hold unused inputs.

These octal buffers and line drivers are designed for low-voltage (3.3V)  $V_{CC}$  applications, but with the capability to provide a TTL interface to a 5V environment. The LVT240 and LVTH240 are fabricated with an advanced BiCMOS technology to achieve high speed operation similar to 5V ABT while maintaining low power dissipation.


# **Ordering Information**

Order Number	Package Number	Package Description		
74LVT240WM	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide		
74LVT240SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide		
74LVT240MSA	MSA20	20-Lead Shrink Small Outline Package (SSOP), JEDEC MO-150, 5.3mm Wide		
74LVT240MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide		
74LVTH240WM	M20B	20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide		
74LVTH240SJ	M20D	20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide		
74LVTH240MSA	MSA20	20-Lead Shrink Small Outline Package (SSOP), JEDEC MO-150, 5.3mm Wide		
74LVTH240MTC	MTC20	20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide		

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering number.

All packages are lead free per JEDEC: J-STD-020B standard.


# **Connection Diagrams**



# **Pin Descriptions**

Pin Names	Description
$\overline{OE}_1$ , $\overline{OE}_2$	3-STATE Output Enable Inputs
I <sub>0</sub> —I <sub>7</sub>	Inputs
$\overline{O}_0 - \overline{O}_7$	3-STATE Outputs

# **Logic Symbols**



# **Truth Tables**

Inp	uts	Outputs
OE <sub>1</sub>	In	Outputs (Pins 12, 14, 16, 18)
L	L	Н
L	Н	L
Н	Х	Z

Inp	uts	Outputs
ŌĒ <sub>2</sub>	In	Outputs (Pins 3, 5, 7, 9)
L	L	Н
L	Н	L
Н	X	Z

H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

Z = High Impedance

# **Absolute Maximum Ratings**

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Rating		
V <sub>CC</sub>	Supply Voltage	-0.5V to +4.6V		
V <sub>I</sub>	DC Input Voltage	-0.5V to +7.0V		
Vo	DC Output Voltage			
	Output in 3-STATE	-0.5V to +7.0V		
	Output in HIGH or LOW State <sup>(1)</sup>	-0.5V to +7.0V		
I <sub>IK</sub>	DC Input Diode Current, V <sub>I</sub> < GND			
I <sub>OK</sub>	DC Output Diode Current, V <sub>O</sub> < GND			
Io	DC Output Current, V <sub>O</sub> > V <sub>CC</sub>			
	Output at HIGH State	64mA		
	Output at LOW State	128mA		
I <sub>CC</sub>	DC Supply Current per Supply Pin	±64mA		
I <sub>GND</sub>	DC Ground Current per Ground Pin	±128mA		
T <sub>STG</sub>	Storage Temperature	−65°C to +150°C		

#### Note:

1. IO Absolute Maximum Rating must be observed.

# **Recommended Operating Conditions**

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

Symbol	Parameter	Min	Max	Units
V <sub>CC</sub>	Supply Voltage	2.7	3.6	V
VI	Input Voltage	0	5.5	V
I <sub>OH</sub>	HIGH-Level Output Current		-32	mA
I <sub>OL</sub>	LOW-Level Output Current		64	mA
T <sub>A</sub>	Free-Air Operating Temperature	-40	85	°C
Δt / ΔV	Input Edge Rate, $V_{IN} = 0.8V-2.0V$ , $V_{CC} = 3.0V$	0	10	ns/V

### **DC Electrical Characteristics**

					T A =	40°C to +	85°C	
Symbol Param		neter	V <sub>CC</sub> (V)	Conditions	Min.	Typ. <sup>(2)</sup>	Max.	Units
V <sub>IK</sub>	Input Clamp Diode Voltage		2.7	I <sub>I</sub> = -18mA			-1.2	V
V <sub>IH</sub>	Input HIGH Voltage		2.7–3.6	$V_0 \le 0.1V$ or	2.0			V
V <sub>IL</sub>	Input LOW Vol	Input LOW Voltage		$V_O \ge V_{CC} - 0.1V$			0.8	V
V <sub>OH</sub>	Output HIGH V	/oltage	2.7–3.6	$I_{OH} = -100 \mu A$	V <sub>CC</sub> -0.2			V
			2.7	$I_{OH} = -8mA$	2.4			
			3.0	$I_{OH} = -32mA$	2.0			
V <sub>OL</sub>	Output LOW V	oltage	2.7	$I_{OL} = 100 \mu A$			0.2	V
				I <sub>OL</sub> = 24mA			0.5	
			3.0	I <sub>OL</sub> = 16mA			0.4	
				$I_{OL} = 32mA$			0.5	
				$I_{OL} = 64 \text{mA}$			0.55	
I <sub>I(HOLD)</sub> (3)	Bushold Input	Minimum	3.0	V <sub>I</sub> = 0.8V	75			μA
,	Drive			V <sub>I</sub> = 2.0V	-75			
I <sub>I(OD)</sub> <sup>(3)</sup>	Bushold Input	Over-Drive	3.0	(4)	500			μA
Current to Cha	inge State		(5)	-500				
I	I <sub>I</sub> Input Current		3.6	V <sub>I</sub> = 5.5V			10	μA
		Control Pins	3.6	$V_I = 0V \text{ or } V_{CC}$			±1	
		Data Pins	3.6	$V_I = 0V$			-5	
				$V_I = V_{CC}$			1	
I <sub>OFF</sub>	Power Off Leal	kage Current	0	$0V \le V_I \text{ or } V_O \le 5.5V$			±100	μA
I <sub>PU/PD</sub>	Power up/down Output Current		0–1.5V	$V_O = 0.5V$ to 3.0V, $V_I = GND$ or $V_{CC}$			±100	μA
I <sub>OZL</sub>	3-STATE Output Current	ut Leakage	3.6	V <sub>O</sub> = 0.5V			-5	μA
I <sub>OZH</sub>	3-STATE Output Current	ut Leakage	3.6	V <sub>O</sub> = 3.0V			5	μA
I <sub>OZH</sub> +	3-STATE Output Current	ut Leakage	3.6	$V_{CC} < V_O \le 5.5V$			10	μA
I <sub>CCH</sub>	Power Supply Current		3.6	Outputs HIGH			0.19	mA
I <sub>CCL</sub>	Power Supply Current		3.6	Outputs LOW			5	mA
I <sub>CCZ</sub>	Power Supply Current		3.6	Outputs Disabled			0.19	mA
I <sub>CCZ</sub> +	Power Supply Current		3.6	$V_{CC} \le V_O \le 5.5V$ , Outputs Disabled			0.19	mA
$\Delta I_{CC}$	Increase in Por Current <sup>(6)</sup>	wer Supply	3.6	One Input at V <sub>CC</sub> – 0.6V, Other Inputs at V <sub>CC</sub> or GND			0.2	mA

#### Notes:

- 2. All typical values are at  $V_{CC} = 3.3V$ ,  $T_A = 25^{\circ}C$ .
- 3. Applies to bushold versions only (74LVTH240).
- 4. An external driver must source at least the specified current to switch from LOW-to-HIGH.
- 5. An external driver must sink at least the specified current to switch from HIGH-to-LOW.
- 6. This is the increase in supply current for each input that is at the specified voltage level rather than  $V_{CC}$  or GND.

# Dynamic Switching Characteristics<sup>(7)</sup>

			Conditions	$T_A = 25^{\circ}C$		2	
Symbol	Parameter	V <sub>CC</sub> (V)	$C_L = 50 pF, R_L = 500 \Omega$	Min.	Тур.	Max.	Units
V <sub>OLP</sub>	Quiet Output Maximum Dynamic V <sub>OL</sub>	3.3	(8)		0.8		V
V <sub>OLV</sub>	Quiet Output Minimum Dynamic V <sub>OL</sub>	3.3	(8)		-0.8		V

#### Notes:

- 7. Characterized in SOIC package. Guaranteed parameter, but not tested.
- 8. Max number of outputs defined as (n). n-1 data inputs are driven 0V to 3V. Output under test held LOW.

### **AC Electrical Characteristics**

				-40°C to - 50pF, R <sub>L</sub> =			
		V <sub>CC</sub>	= 3.3V ±0	0.3V	V <sub>CC</sub>	= 2.7V	
Symbol	Parameter	Min.	Typ. <sup>(9)</sup>	Max.	Min.	Max.	Units
t <sub>PLH</sub>	Propagation Delay, Data to Output	1.1		3.8	1.1	4.6	ns
t <sub>PHL</sub>		1.3		4.0	1.3	4.2	
t <sub>PZH</sub>	Output Enable Time	1.1		4.6	1.1	5.6	ns
t <sub>PZL</sub>		1.4		4.4	1.4	5.1	
t <sub>PHZ</sub>	Output Disable Time	2.0		4.5	2.0	4.7	ns
t <sub>PLZ</sub>		1.8		4.3	1.8	4.3	
t <sub>OSHL</sub> , t <sub>OSLH</sub>	Output to Output Skew <sup>(10)</sup>			1.0		1.0	ns

#### Notes:

- 9. All typical values are at  $V_{CC} = 3.3V$ ,  $T_A = 25$ °C.
- 10. Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>).

# Capacitance<sup>(11)</sup>

Symbol	Parameter	Conditions	Typical	Units
C <sub>IN</sub>	Input Capacitance	$V_{CC} = 0V$ , $V_I = 0V$ or $V_{CC}$	3	pF
C <sub>OUT</sub>	Output Capacitance	$V_{CC} = 3.0V$ , $V_{O} = 0V$ or $V_{CC}$	6	pF

#### Note:

11. Capacitance is measured at frequency f = 1MHz, per MIL-STD-883, Method 3012.


# **Physical Dimensions** 13.00 12.60 11.43 В 9.50 10.65 7.60 10.00 7.40 PIN ONE 0.35 INDICATOR **⊕** 0.25 **M** C B A LAND PATTERN RECOMMENDATION 2.65 MAX SEE DETAIL A 0.33 0.20 △ 0.10 C 0.30 0.10 0.75 SEATING PLANE NOTES: UNLESS OTHERWISE SPECIFIED (R0.10) A) THIS PACKAGE CONFORMS TO JEDEC GAGE PLANE MS-013, VARIATION AC, ISSUE E (R0.10) B) ALL DIMENSIONS ARE IN MILLIMETERS. 0.25 C) DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS. D) CONFORMS TO ASME Y14.5M-1994 0.40 SEATING PLANE E) LANDPATTERN STANDARD: SOIC127P1030X265-20L (1.40)DETAIL A F) DRAWING FILENAME: MKT-M20BREV3


Figure 1. 20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.


Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: http://www.fairchildsemi.com/packaging/


# Physical Dimensions (Continued)





LAND PATTERN RECOMMENDATION






DIMENSIONS ARE IN MILLIMETERS

# NOTES:

- A. CONFORMS TO EIAJ EDR-7320 REGISTRATION, ESTABLISHED IN DECEMBER, 1998.

  B. DIMENSIONS ARE IN MILLIMETERS.
  C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.



M20DREVC


Figure 2. 20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide


Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:


http://www.fairchildsemi.com/packaging/


# Physical Dimensions (Continued)





LAND PATTERN RECOMMENDATIONS






#### DIMENSIONS ARE IN MILLIMETERS

#### NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-150, VARIATION AE, DATE 1/94.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ASME Y14.5M 1994.




MSA20REVB


Figure 3. 20-Lead Shrink Small Outline Package (SSOP), JEDEC MO-150, 5.3mm Wide

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: http://www.fairchildsemi.com/packaging/


# Physical Dimensions (Continued)

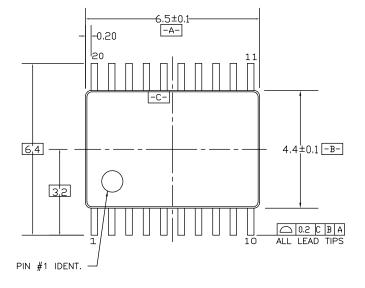




LAND PATTERN RECOMMENDATION


-12.00°






#### NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MD-153, VARIATION AC, REF NOTE 6, DATE 7/93.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLDS FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.





DETAIL A

MTC20REVD1

# Figure 4. 20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings: http://www.fairchildsemi.com/packaging/





#### **TRADEMARKS**

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

Build it Now™ CorePLUS™  $CROSSVOLT^{\text{TM}}$ **CTL™** 

Current Transfer Logic™ EcoSPARK® EZSWITCH™ \*

Fairchild<sup>®</sup> Fairchild Semiconductor® FACT Quiet Series™

FACT<sup>®</sup>  $\mathsf{FAST}^{\mathbb{R}}$ FastvCore™ FlashWriter® 3 FPS™  $\mathsf{FRFET}^{\scriptscriptstyle{\textcircled{\tiny{\$}}}}$ 

Global Power Resource<sup>sм</sup>

Green FPS™

Green FPS™e-Series™

GTO™ i-Lo™ IntelliMAX™ ISOPLANAR™

MegaBuck™ MICROCOUPLER™ MicroFET™

MicroPak™ MillerDrive™ Motion-SPM™ OPTOLOGIC®

OPTOPLANAR®

PDP-SPM™ Power220® POWEREDGE® Power-SPM™ PowerTrench<sup>®</sup>

Programmable Active Droop™

QS™

QT Optoelectronics™ Quiet Series™ RapidConfigure™ SMART START™ SPM<sup>®</sup> STEALTH™ SuperFET™

SuperSOT™3 SuperSOT™6 SuperSOT™8 SupreMOS™ SyncFET™ SYSTEM ® GENERAL

The Power Franchise®

խwer franchise TinyBoost™ TinyBuck™ TinyLogic<sup>®</sup> TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™ μSerDes™ UHC®

Ultra FRFET™ UniFET™ VCX™

#### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- 2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.

Rev. I33

<sup>\*</sup> EZSWITCH™ and FlashWriter® are trademarks of System General Corporation, used under license by Fairchild Semiconductor.