




TECDIA CO., LTD.

2F Tamachi Kiyota Bldg.

4-3-4 Shibaura Minato-ku, Tokyo 108-0023 Japan

TEL: 81-3-5765-5400 FAX: 81-3-5765-5404

## SPECIFICATION SHEET

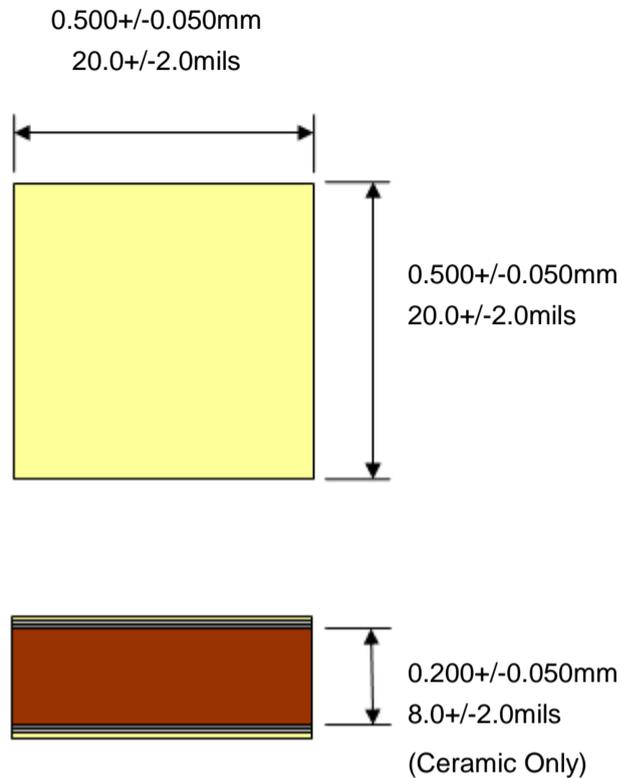

Manufactured to metric dimensions. Imperial units are for reference only.

Part Number:	CMS200M2HC-FK
Dielectric Constant(K):	1600
Capacitance Value:	20[pF] @ 1kHz, 1 Vrms, 25°C, No DC Bias
Capacitance tolerance:	M (tolerance: ± 20% )
Dissipation Factor (DF):	2.5% Max @ 1kHz, 1Vrms, 25°C, No DC Bias
Rated working voltage (RWV):	50 V
Insulation Resistance (IR):	100,000MΩ Min @ 50Vdc, 25°C
Dielectric Withstanding Voltage (DWV):	No breakdown @ 125Vdc x 2sec, 25°C
Temperature Characteristic of Capacitance:	±15% (X7R @ -55 °C to +125 °C) @ 1kHz, 1Vrms, No DC Bias
Metallization:	
Top:	TiW-Pt - Au 2.5μm Min
Bottom:	TiW-Pt - Au 2.5μm Min

## NOTES:

- Other specifications not listed are available at [www.tecdia.com](http://www.tecdia.com). Specifications are subject to change without prior notice.
  - RoHS compliant.
  - Wire bonding location should be 25um or further from the edges of electrode to avoid electrode peeling.
  - Capacitance, Temperature Coefficient and Dissipation Factor are measured before any AC or DC bias has been applied.
  - Recommended Storage Conditions (Waffle Packaging): 23 +/- 10°C @ 60% RH Max
  - Guaranteed Shelf Life: Within 1 year after delivery under recommended storage conditions.
  - Successful wire bonding and die attachment are dependent on the types of bonding tools and conditions used. Please check the wire bonding and die attach conditions of your site to prevent wire/electrode peeling or detaching.
- Tecdia is not responsible for mechanical issues such as cracking or detaching that can occur when solder die mounting.

PREPARED BY: A. Suenaga 2022/10/6	DESCRIPTION: CHIP CAPACITOR	Scale: Not to Scale
APPROVED BY: T.Yoshikawa 2022/10/6	TECDIA PART NUMBER: CMS200M2HC-FK	SHEET: 1 of 1