

# ARTESYN AVE450/500 SERIES

50 Volts; 450/500 Watts



Advanced Energy's Artesyn AVE450/500 series half-brick isolated DC-DC converter provides a single regulated low noise output, 28 Vdc that can deliver up to 16 amps (AVE450B-48S28) or 50V that can deliver up to 10 amps (AVE500-48S50). It has a wide 2:1 input range of 36 to 75 Vdc and is designed primarily for use with standard 48 V telecommunications equipment supplies. The converter's main application area is in low power and remote radio head (RRH) telecommunications applications.

## **DATA SHEET**

#### **Total Power:**

450/500 Watts

## **Input Voltage:**

36 - 75 V

### # of Outputs:

Single

#### **SPECIAL FEATURES**

- 2:1 Wide input range
- Extra wide trim range 25 57 V for 50 Vo
- Optimised for high power density, small space applications
- Low ripple and noise
- Fixed switching frequency
- Super high efficiency
- High capacitive load capability
- Basic insulation system
- Aluminium substrate design

#### **SAFETY**

- TUV/CE 62368-1
- UL/cUL 60950-1



# **ELECTRICAL SPECIFICATIONS**

Input				
Input range	36 - 75 Vdc			
Efficiency	95%			
Output				
Voltage	50 V ± 1%			
Current	9 A (AVE450) 10 A (AVE500)			
Line regulation	± 0.5%			
Load regulation	± 0.5%			
Noise/ripple	120 mV			
Overvoltage protection	Hiccup			
Overtemperature protection	Auto-restart			
Switching frequency	280 kHz			
Temperature co-efficient	± 0.02/°C			
Isolation				
I/O isolation	2250 Vdc min.			

# **ENVIRONMENTAL SPECIFICATIONS**

Operating ambient temperature range	-40 °C to +85 °C	
Storage temperature	-55 °C to +125 °C	
Humidity	5% to 95% (non-condensing)	
MTBF	1.5 Million hours	
RoHS compliant	6/6	




# **ORDERING INFORMATION**

Model number	Input voltage	Output voltage	Power
AVE450-48S50-6L	36 - 75 Vin	50 V @ 9 A	450 W
AVE450-48S50P-6L	36 - 75 Vin	50 V @ 9 A	450 W
AVE500-48S50-6L	36 - 75 Vin	50 V @ 10 A	500 W
AVE500-48S50P-6L	36 - 75 Vin	50 V @ 10 A	500 W

Standard version is negative enable

- -6 = 3.8 mm pin length
- -L = RoHS 6/6 compliance
- -M = Thread hole fixture
- -P = Positive remote control

# **MECHANICAL DRAWINGS**

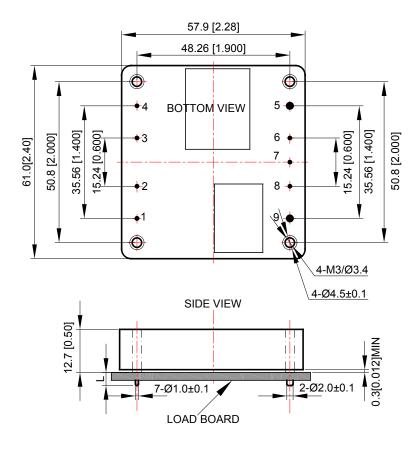

UNIT: mm[inch] BOTTOM VIEW: pin on upside

$$\begin{split} \text{TOLERANCE: X.Xmm} &\pm 0.5 \text{mm} [\text{X.XX in.} \pm 0.02 \text{in.}] \\ &\quad \text{X.XXmm} \pm 0.25 \text{mm} [\text{X.XXX in.} \pm 0.01 \text{in.}] \end{split}$$



# PIN LENGTH OPTION

Device code suffix	L	
-4	4.8mm ± 0.5mm	
-6	3.8mm ±0.5mm	
-8	2.8mm ± 0.5mm	
None	5.8mm ± 0.5mm	

# **PIN DESIGNATIONS**

Pin No.	Name	Function
1	V <sub>in</sub> +	Positive input voltage
2	CNT	Remote ON/OFF control
3	Case	Case
4	V <sub>in</sub> -	Negative input voltage
5	V <sub>o</sub> -	Negative output voltage
6	S-	Negative remote sense
7	Trim	Output voltage trim
8	S+	Positive remote sense
9	V <sub>o</sub> +	Positive output voltage

- Notes:

  1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
- 3. Label and logo appearance may vary from what is shown on mechanical drawings.





# **ABOUT ADVANCED ENERGY**

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

# PRECISION | POWER | PERFORMANCE

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2020 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.



For international contact information, visit advancedenergy.com.

powersales@aei.com (Sales Support) productsupport.ep@aei.com (Technical Support) +1 888 412 7832